



Manufactured according to OIML R60 standards

Capacity from 5000 kg to 20000 kg

- 17-4 PH STAINLESS STEEL
- HOLES FOR STANDARD SHACKLES
- COMBINED ERROR ≤ ±0.03%
- PROTECTION CLASS IP68



CAPACITY	kg					NET WEIGHT (kg)	CODE
5000		•	•	•	•	4.5	TAL5000
10000		•	•	•	•	4.6	TAL10000
20000		•	•	•	•	6.6	TAL20000

ON REQUEST


CERTIFICATIONS

	Complies with the Eurasian Custom Union standards
CERTIFICATIONS ON REQUEST	
	Accredia traceable calibration report
	ATEX II 1GD (zone 0-1-2-20-21-22)
	IECEx (zone 0-1-2-20-21-22)
	Complies with the Eurasian Custom Union standards for use in potentially explosive atmospheres

OPTIONS ON REQUEST

DESCRIPTION
 Two redundant strain gauges Wheatstone bridges (350 Ω) with two output cables; for dual safety systems.

DIMENSIONS (mm)

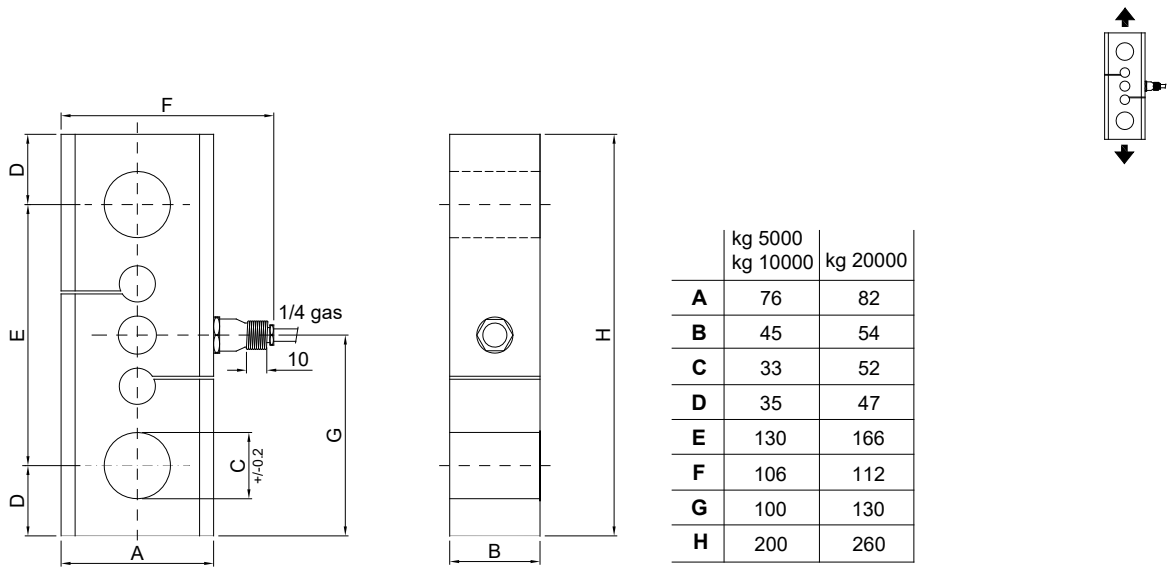

TECHNICAL FEATURES

Material	AISI 420 stainless steel		
Nominal load (E max)	5000 - 10000 - 20000 kg		
Combined error	≤ ±0.03%		
Protection class	IP68		

Rated output	2 mV/V ±0.1%	Input resistance	350 Ω ±5
Temperature effect on zero	0.005% °C	Output resistance	350 Ω ±5
Temperature effect on span	0.003% °C	Zero balance	±1%
Compensated temperature range	-10 °C / +50 °C	Insulation resistance	>5000 MΩ
Operating temperature range	-20 °C / +70 °C	Safe overload (% of full scale)	150%
Creep at nominal load in 30 minutes	0.03%	Ultimate overload (% of full scale)	300%
Max supply voltage without damage	15 V	Deflection at nominal load	0.3 mm

ELECTRICAL CONNECTIONS

Cable lenght	10 m
Cable diameter	5 mm
Cores	6 x 0.14 mm²

SHIELD	
+ SIGNAL	GREEN
+ EXCITATION + REF./SENSE	RED BLUE
- SIGNAL	WHITE
- EXCITATION - REF./SENSE	BLACK YELLOW/BROWN

Rev. 0.0

The Company reserves the right to make changes to the technical data, drawings and images without notice.