



프레스용 로드셀 CKS

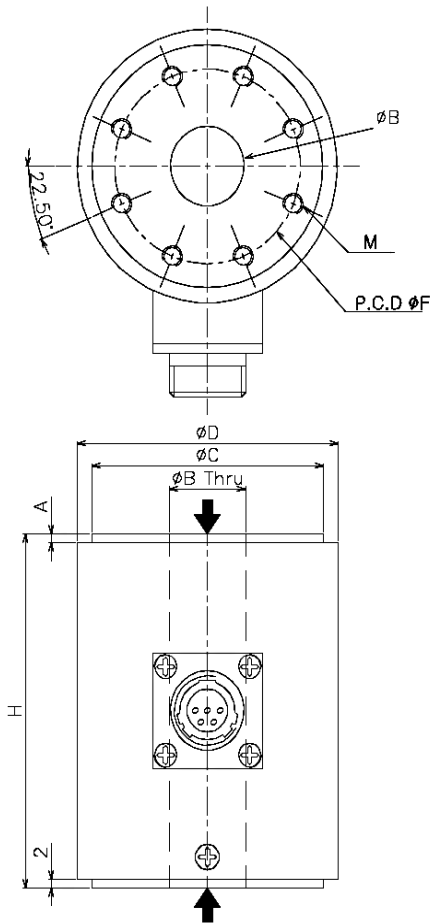

Capacity	H	A	ΦB	ΦC	ΦD	ΦF	M
500kg	50	1	10	24	40	18	2x4-M4 DP10
1T~5T	70	2	18	55	62	44	2x8-M5 DP10
10T	80	2	18	55	62	44	2x8-M5 DP10
20T	80	3	43	68	96	56	2x8-M6 DP10
50T	110	3	80	112	130	96	2x6-M8 DP10
100T	110	3	85	118	158	102	2x6-M12 DP10
200T	120	3	120	162	240	140	2x6-M12 DP12
300T	120	3	120	179	240	150	2x6-M12 DP15
500T	200	8	150	227	265	190	2x12-M12 DP15

MODEL		CKS
RATED CAPACITY(R.C)	kgf / tf	500kg,1,2,3,5,10,20,50,100,200,300,500tf
Rated Output(R.O)	mV/V	1.0±0.3%
Combined Error	%R.O.	0.5%
Repeatability	%R.O.	0.1
Temperature Effect on Zero value	%R.O.10°C	0.1
Temperature Effect on Output Value	%R.O.10°C	0.1
Zero Balance	%R.O.	±1
Recommended Excitation	V DC	10
Maximun Excitation	V DC	15
Input Resistance	Ω	800±50
Output Resistance	Ω	700±7
Insulation Resistance	M Ω	> 2000
Compensated Temperature Range	°C	-10 ~+70
Operating temperature Range	°C	-20~~+80
Safe Overload	%R.C.	150
Material		Alloy Steel

- * Cable standard : FTI 4CX22AWG UL-ROHS RS3674 3M
- * Cable option : FTI 4CX22AWG UL-ROHS RS3674 5M
- * Cable option : FTI 4CX22AWG UL-ROHS RS3674 10M