



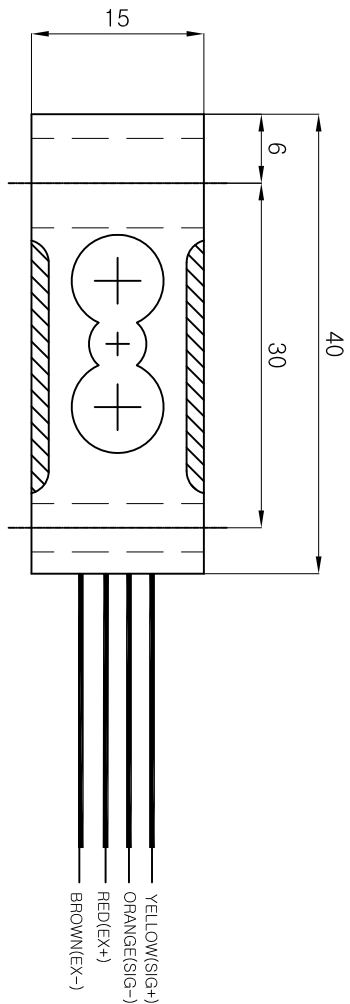


MODEL NO.	PART NO.	REV	S/M	CONTENTS	DRAWN	CHECKED	APPROVED
-----------	----------	-----	-----	----------	-------	---------	----------

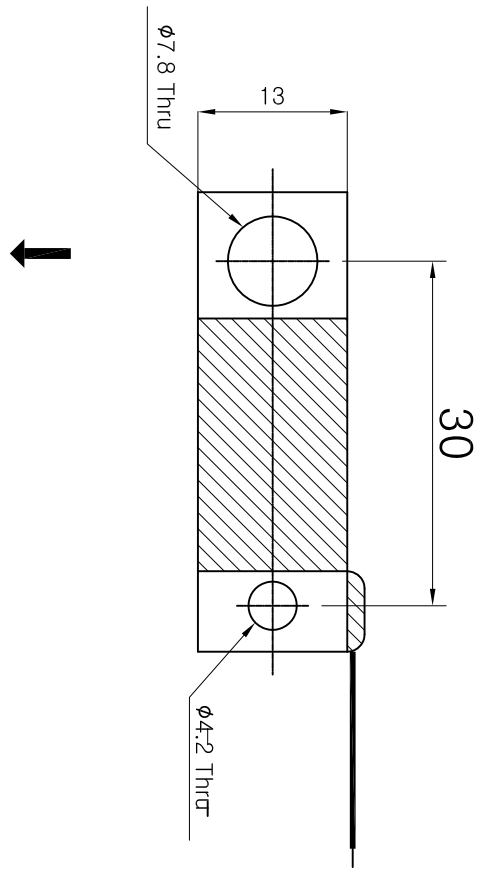

Capacity(용량)	kgf	30
Rated Output(정격 출력)	mV/V	2.0±0.2
Zero Balance(무부하 범위)	mV/V	0.0±0.05
Combined Error(종합 오차)	%RO	±0.1
Creep for (30min.)N분출력편차	%RO	±0.03
Temperature effect on(온도변화에 따른 범위)		
Zero Value(영점값)	%RO/10°C	±0.03
Output Value(출력값)	%RO/10°C	±0.03
Excitation(인가전압)	V	10
Recommended(권고 전압)	V	15
Maximum(최대 전압)	V	15
Resistance(저항)	Ω	350±3.5
Input(입력저항)	Ω	350±3.5
Output(출력저항)	Ω	350±3.5
Insulation(절연저항)	MΩ	>2000@50V DC
Compensated Temp.Range	°C	-10 ~ +40
Operating Temp.Range(작동범위)	°C	-20 ~ +70

NOTICE

Cable color code

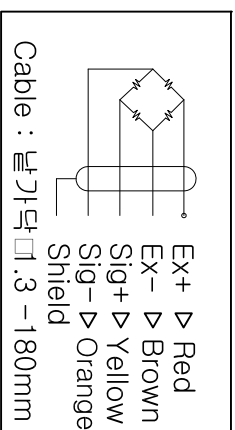

CBCL-30LP

TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME OR TITLE		CASKOREA			
ANGULAR ± 0.5°		CBCL-30LP					
DECIMAL ± 0.1		FIRST USED IN ASSEMBLY					
QTY/SET n / s		FIRST MADE FOR CONTRACT OR CUSTOMER NO.					
DRAWN		CHECKED 1		CHECKED 2		APPROVED	
Y.S. Lee						N/A	
.20		.20		.20		.20	