




MODEL NO.		PART NO.		REVISIONS		CONTENTS		DRAWN	CHECKED	APPROVED
				REV	SYM					

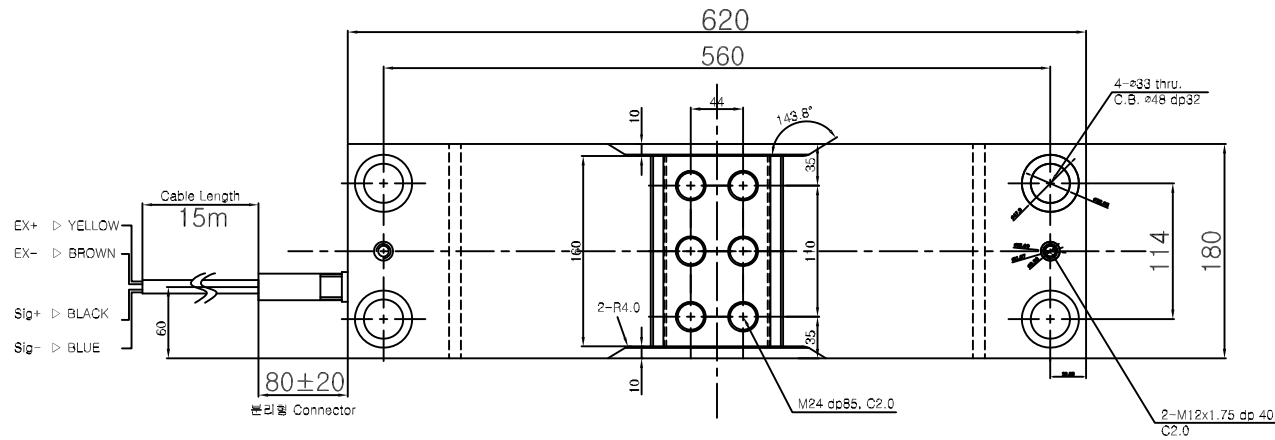

SPECIFICATION	
Capacity	200tf
Rated output	1.6±10% mV/V
Zero balance	0±0.02 mV/V
Combined error	≤ 0.1% R.O.
Temperature effect on	
Zero value	±0.03%/10°C
Span value	±0.03%/10°C
Excitation voltage	
Recommended	10V DC
Maximum	15V DC
Resistance	
Input	800±40(Ohm)
Output	700±7(Ohm)
Insulation	> 2000Mohm
Compensated temperature range	-10°C~130°C
Operating temperature range	-20°C~150°C

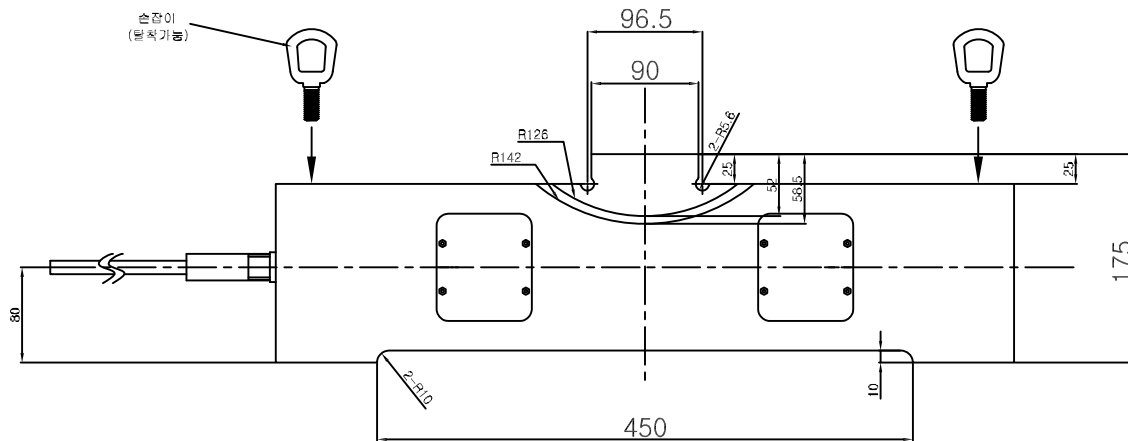

cable : 7PIN,CONNECTOR 26DX75H,CABLE 7.1DX15M

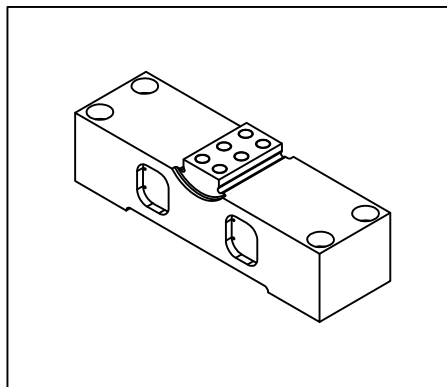

TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME OR TITLE			DSBPO-200T Specification			CASKOREA		
ANGULAR ± 0.5°										
DECIMAL ± 0.1		FIRST USED IN ASSEMBLY						MATERIAL		
		QTY/SET			FIRST MADE FOR			END FINISH		
		n/s			CONTRACT OR CUSTOMER NO.			DO NOT SCALE DRAWING		
								DIMENSIONS ARE IN ϕ MM UNCH		
DRAWN		CHECKED 1		CHECKED 2		APPROVED		SCALE	DRAWING PART NO.	REV
SUNGSOO PARK								N/A		
6. 12. .2007		.20		.20		.20				