


MODEL NO.		PART NO.		REVISIONS		CONTENTS		DRAWN	CHECKED	APPROVED
				REV	SYM					

SPECIFICATION

Capacity	2tf
Rated output	2.0±0.005mV/V
Zero balance	0±0.05mV/V
Combined error	≤ 0.03% R.O.
Repeatability	≤ 0.01% R.O.
Creep for 30min.	≤ 0.03% R.O.
Return for 30min.	≤ 0.03% R.O.
Temperature effect on	
Zero value	±0.028%/10°C
Span value	±0.015%/10°C
Excitation voltage	
Recommended	10V DC
Maximum	15V DC
Resistance	
Input	350±3.5(Ohm)
Output	350±3.5(Ohm)
Insulation	2000Mohm
Compensated temperature range	-10°C~40°C
Operating temperature range	-20°C~70°C
Material	Stainless steel
Cable Length	ø5.4*4P*3m-urethane

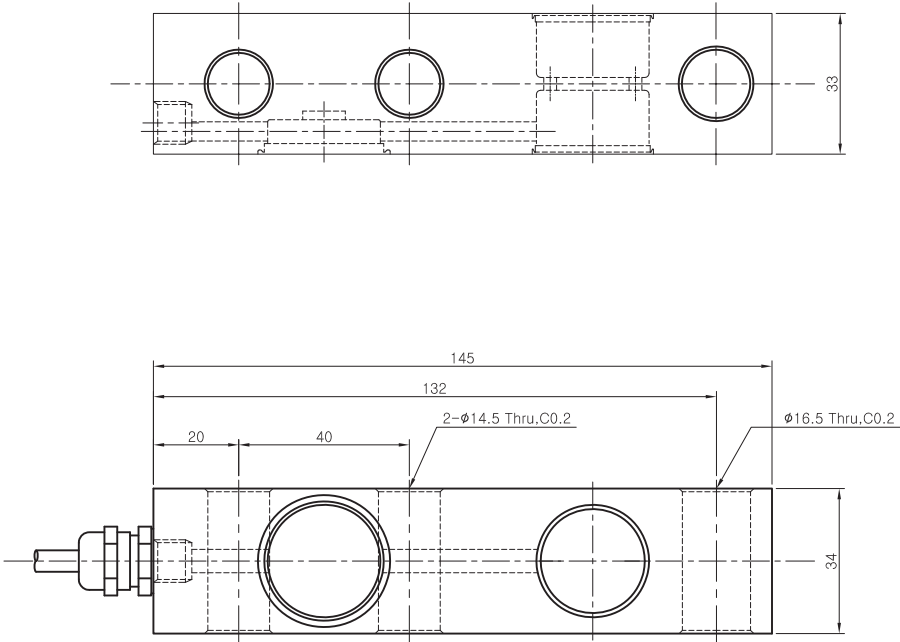

TOLERANCES .UNLESS OTHERWISE SPECIFIED		NAME OR TITLE BSAS-2T Specification			CAS CAS CORPORATION #19 KANAP-RI KWANGJEOK-MYON YANGJU-SI KYUNGKI-DO,KOREA		
ANGULAR ±0.5							
DECIMAL ± 0.1		FIRST USED IN ASSEMBLY			MATERIAL Stainless steel		
	Q'TY/SET	FIRST MADE FOR			END FINISH		
	n s	CONTRACT OR CUSTOMEDR NO.			DO NOT SCALE DRAWING		DIMENSIONS ARE IN (MM) INCH
DRAWN		CHECKED1	CHECKED2	APPROVED	SCALE	DRAWING.PART NO.	REV
Lim,chunki					N/A		
09 . 29 . 2009		. . 20	. . 20	. . 20			