
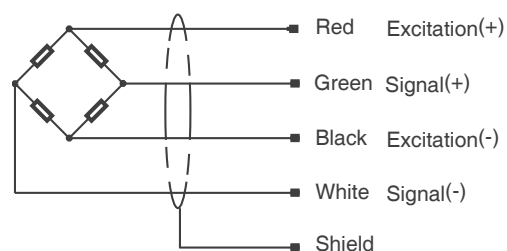



A stainless steel linear actuator assembly. It consists of a cylindrical actuator mounted on a rectangular stainless steel plate. Three stainless steel pulleys are attached to the plate. The actuator has a label with technical specifications.

- Dimensions(in mm)

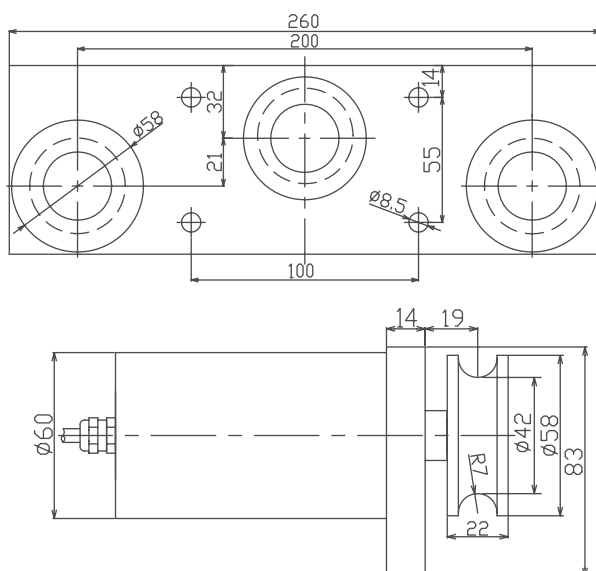

Rated Load	kg	100, 200, 300, 500, 1000
Rated Output	mV/V	1.5
Zero Balance	%R.O.	±1
Comprehensive Error	%R.O.	±0.3
Temp. effect/10℃ on output	%R.O./10 ℃	±0.05
Temp. effect/10℃ on zreo	%R.O./10 ℃	±0.05
Recommended excitation voltage	VDC	5-12 /15(max)
Input / Output impedance	Ω	380±10 / 350±5
Insulation resistance	MΩ	≥5000 (50VDC)
Safe / Ultimate overload	%R.C.	150 / 300
Material		Alloy Steel
Degree of protection		IP65
The length of the cable	m	3