


STB-100




Quarter, half, full Bridge Strainage 지원

Shunt Calibration 기능을 내장

폭넓은 Zero Balance 기능을 내장

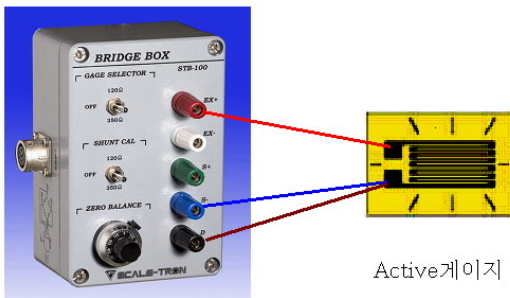

Active게이지

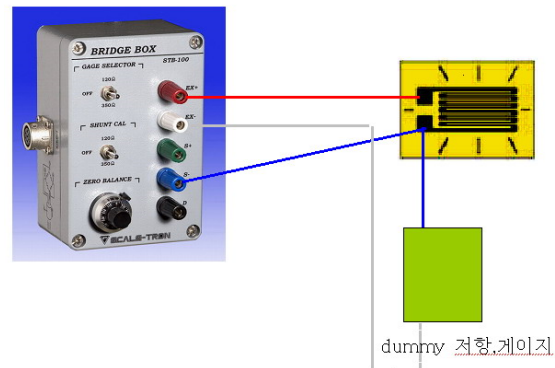

dummy 저항, 게이지

Specifications

Bridge Resistance	Internal : 350Ωx 3, 120Ω x 1
Input	1/4 , 1/2, Full Bridge
Shunt Calibration	standard resistor built-in : 1000με(for strainage 120Ω,350Ω G.F=2) 0.5mV/V (for transducer 350Ω)
Polarity	Switch : Zero/ Positive
Zero Adjust	± 5000με
Output Accuracy	± 0.01 %
Repeatability	± 0.01 %
Connector	Tajimi connector, round terminal
Max. Exciation	20Volts AC or DC
Size	128 x 82 x 58 mm

CASKOREA

TEL : 031-750-0780

FAX : 031-750-0784

E-Mail : cas@caskoreea.co.kr