



Universal Bending Beam Load Cell

>Model UU74

초소형 사이즈의 인장로 고정밀도 로드셀.
인장 및 압축으로 사용.

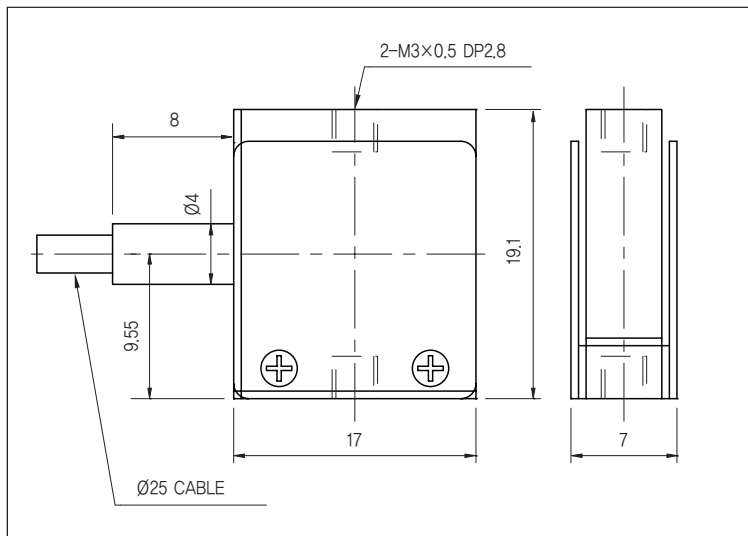

>SPECIFICATIONS

Specifications	Accuracy
Rated capacity(R.C.)	20N, 50N, 100N, 200N
Rated output(R.O.)	2mV/V $\pm 25\%$
Nonlinearity	0.1% R.O.
Hysteresis	0.1% R.O.
Repeatability	0.5% R.O.
Zero balance	$\pm 3\%$ R.O.
Temperature effect, on rated output	0.1% R.O./10°C
Temperature effect, on zero balance	0.1% LOAD/10°C
Temperature range, compensated	-10°C to 60°C
Temperature range, safe	-20°C to 80°C
Terminal resistance input	350Ω $\pm 50\Omega$
Terminal resistance output	350Ω $\pm 5\Omega$
Insulation resistance bridge/case	2000MΩ
Excitation recommended	10V
Safe overload	150% R.C.
Cable length	Ø2.5, 4core shield cable, 1.5m

★Specifications are subject to change without notice.