


PTX150은 저렴하고 컴팩트하며 사용하기 쉬운 인코더 기반 케이블 연장 변환기입니다. 최대 150인치의 전체 스트로크 범위에서 사용할 수 있습니다. PTX150은 증분 인코더 피드백 신호를 제공합니다.

트랜스듀서 본체를 고정된 표면에 장착하고 연장 케이블을 움직이는 물체에 부착하기만 하면 됩니다. PTX150은 공간과 비용이 제한된 애플리케이션에 권장됩니다.

Output Signal

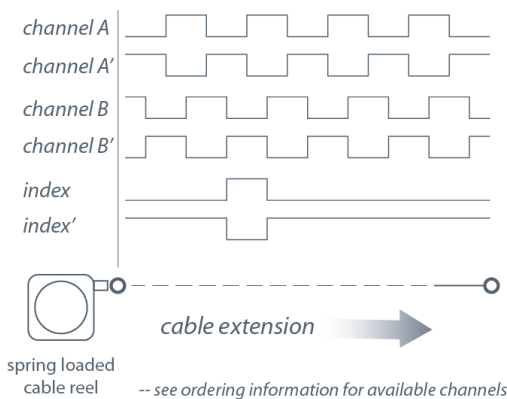

PTX150

Cable Actuated Sensor Incremental Encoder Output

Linear Position to 150 inches (3810 mm)

Compact Design • OEM Applications

Anodized Aluminum Enclosure

IP50 / NEMA 1 • Automation & Testing Applications

General

Full Stroke Range	0-25 to 0-150 in., 0-625 to 0-3750 mm
Output Signal	incremental encoder (quadrature)
Accuracy	see ordering information
Repeatability	± 0.02% full stroke
Resolution	25 to 1250 pulses per inch
Measuring Cable	0.019-in. dia. nylon-coated stainless steel
Enclosure Material	anodized aluminum
Sensor	optical encoder
Maximum Retraction	see ordering information
Acceleration	
Weight (maximum)	1 lb. max.


Electrical

Input Voltage	see ordering information
Input Current	see ordering information
Electrical Connection	18-inch multiconductor cable


Environmental

Enclosure	IP50, NEMA 1
Humidity	98% RH non-condensing
Operating Temperature	0° to 160°F (-17° to 71°C)
Vibration	up to 10 g @58 to 500 Hz

Outline Drawing (25, 50-inch & 625, 1250 mm ranges)

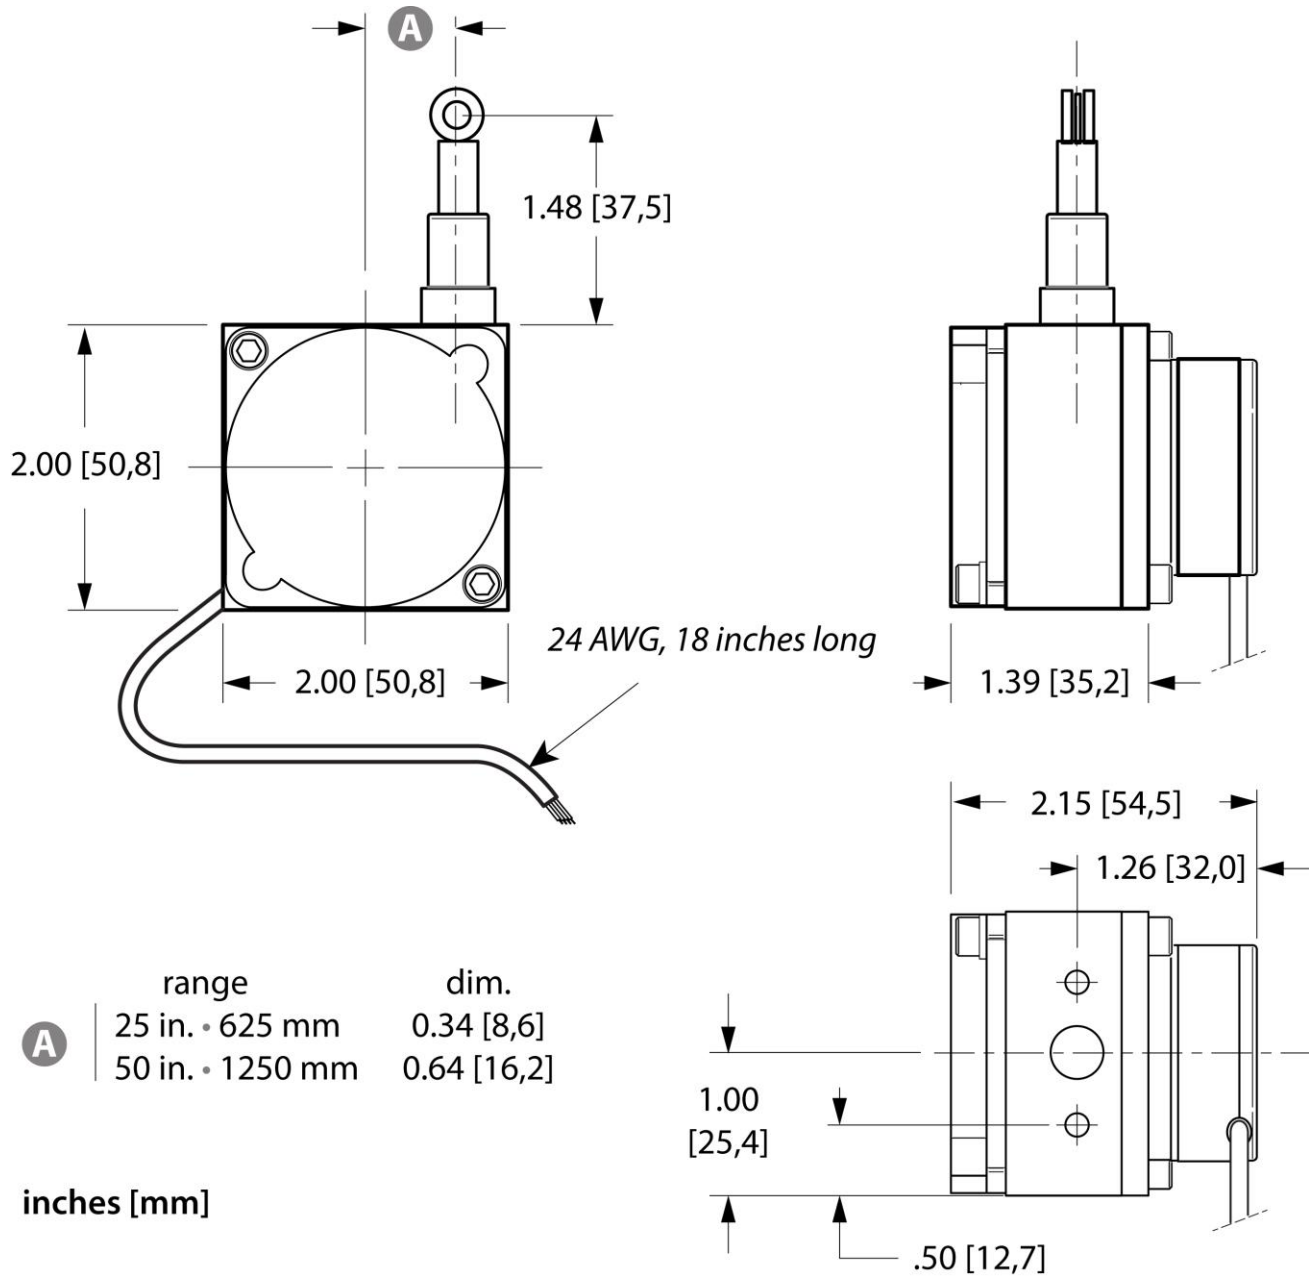

Outline Drawing (100, 150-inch & 2500, 3750 mm ranges)

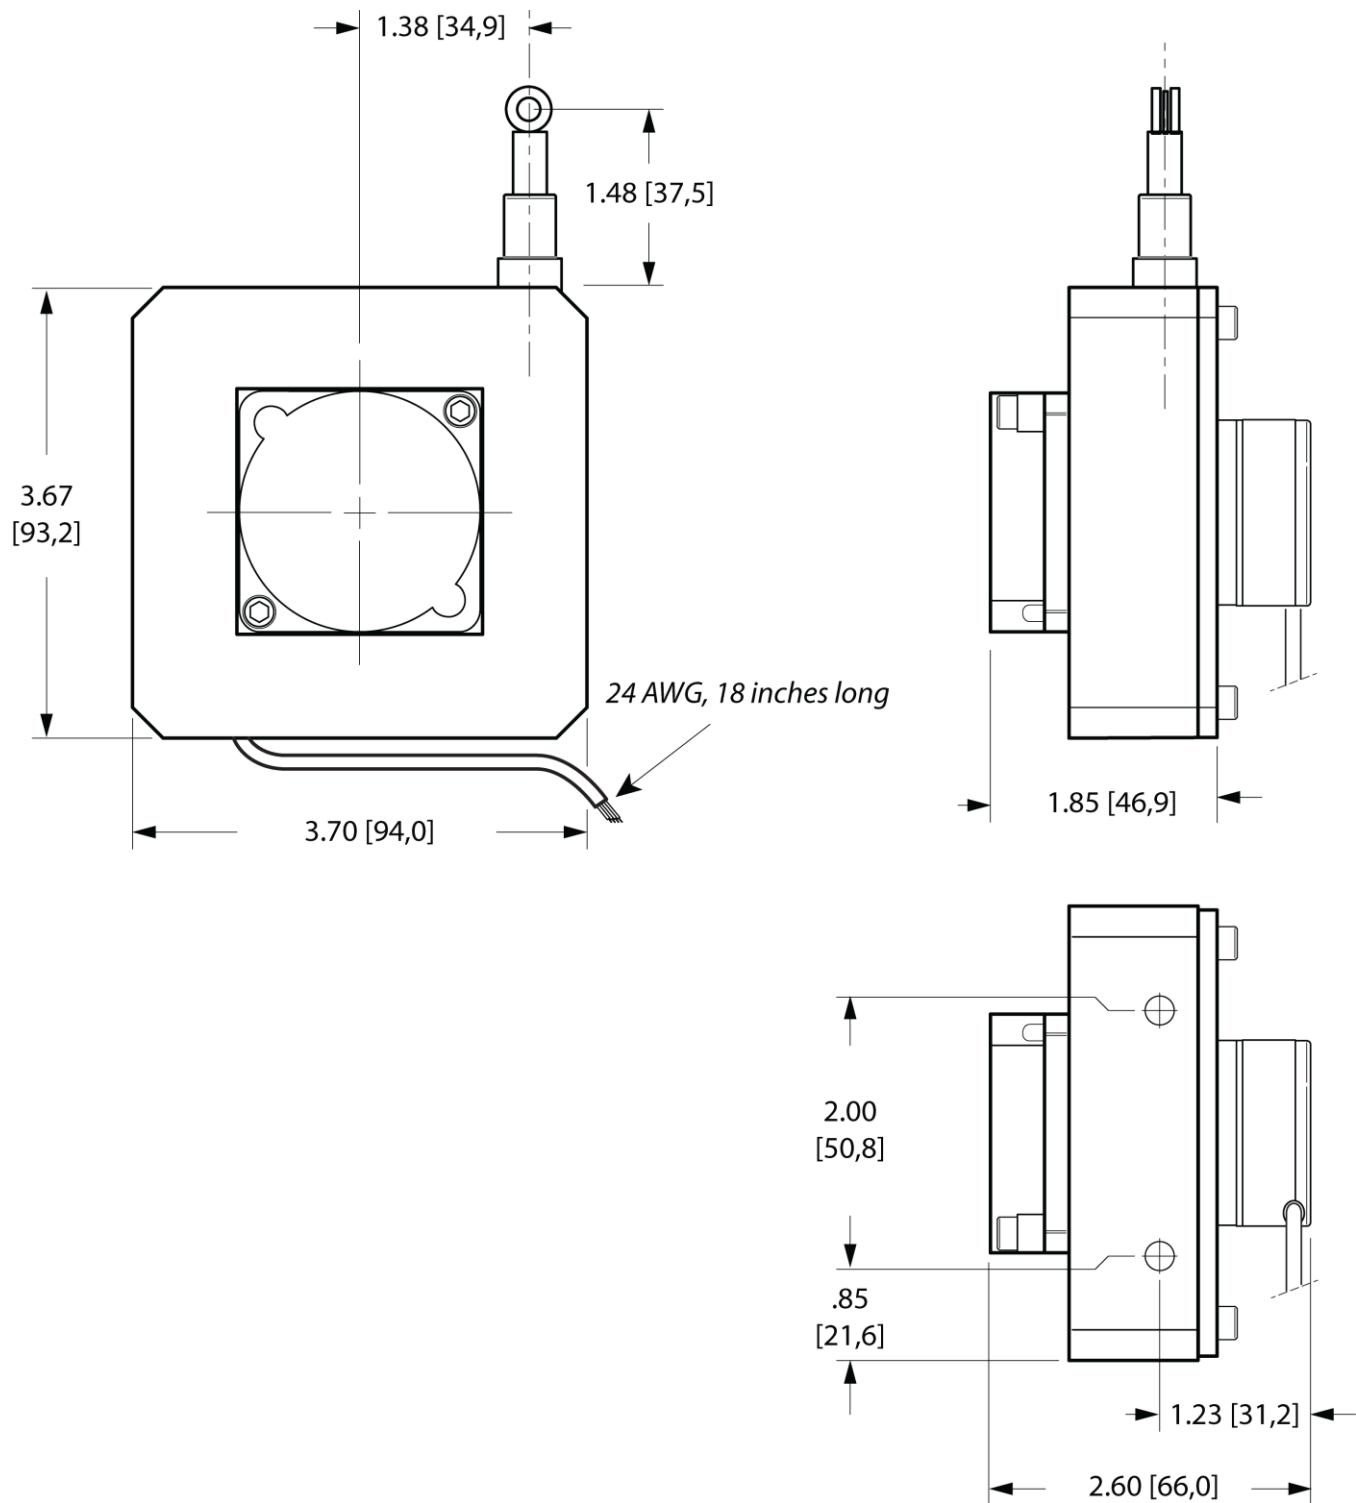

PTX150

Incremental Encoder Output

Model Number:

PTX150 - **1** **1** - **0** **0**
order code: R A B C D E F G

Sample Model Number:

PTX150 - 0025 - 111 - 1110


R range: 25 inches
A mounting holes: 8-32 x .25 in. threaded
D output signal: TTL/CMOS driver, Channels A,B
E resolution: 500 pulses per inch

Full Stroke Range:

R order code:	0025	0050	0100	0150	0625	1250	2500	3750
full stroke range, min:	25 in.	50 in.	100 in.	150 in.	625 mm	1250 mm	2500 mm	3750 mm
accuracy:	±0.010 in.	±0.020 in.	±0.040 in.	±0.060 in.	±0.25 mm	±0.50 mm	±1.00 mm	±1.50 mm
repeatability:	±0.005 in.	±0.010 in.	±0.020 in.	±0.030 in.	±0.12 mm	±0.25 mm	±0.50 mm	±0.75 mm
cable tension (±20%):	13 oz.	6 oz.	14 oz.	8 oz.	3,6 N	1,8 N	5,0 N	3,0 N

Mounting Holes:

G order code:	1	2
	#8-32 x 0.25-in. threaded holes	M6 x 6,4 mm threaded holes

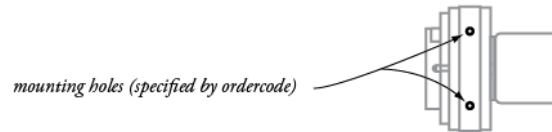

Output Signals:

D order code:	1	2	3	4
driver option:	 TTL - CMOS	 Open Collector	 5 Volt Line Driver	 Universal Line Driver
Specs:	Input voltage (V+): 4.5...13.2 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 10.8...26.4 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 5 Vdc Sink current: 20 mA max. Input current: 150 mA max.	Input voltage (V+): 5...30 Vdc Source/Sink current: 20 mA max. Input current: 100 mA max, no load
Signal:	4.5 - 13.2 VDC Channel A Channel B Common	10.8 - 26.4 VDC Channel A Channel B Common	4.5 - 13.2 VDC Channel A Channel A' Channel B Channel B' Index Index' Common	5 - 30 VDC Channel A Channel A' Channel B Channel B' Index Index' Common
Color Code:	Red White Green Black	Red White Green Black	Red White Gray Green Blue Yellow Orange Black	Red White Gray Green Blue Yellow Orange Black

Resolution:

E order code:	1	2	3	4
25 in. range:	500 ppi	1000 ppi	1250 ppi	50 ppi
50 in. range:	250 ppi	500 ppi	625 ppi	25 ppi
100 in. range:	100 ppi	200 ppi	250 ppi	10 ppi
150 in. range:	100 ppi	200 ppi	250 ppi	10 ppi
625 mm range:	20 ppmm	40 ppmm	50 ppmm	2 ppmm
1250 mm range:	10 ppmm	20 ppmm	25 ppmm	1 ppmm
2500 mm range:	5 ppmm	10 ppmm	12,5 ppmm	0,5 ppmm
3750 mm range:	4 ppmm	10 ppmm	12,5 ppmm	0,5 ppmm