

LC8407 Series

Tool Steel

호퍼/체커/플로어/벤치스케일용

- 방진, 방수등급 : IP 66 기준에 의한 설계
- 탱크 · 호퍼의 플랫폼 스케일에 최적
- 인장 · 압축 겸용



SPECIFICATIONS


Model	LC8407 Series
정격출력	3.0±0.0075mV/V
한계과부하	150%
종합오차	0.03%
크리프(30분)	0.03%
재현성	0.01%
제로바란스	0±0.03mV/V
온도보상범위	-10~+40℃
사용온도범위	-30~+80℃
권장인가전압	10V
최대인가전압	15V
입력단자간저항	350Ω ± 3.5Ω
출력단자간저항	350Ω ± 3.5Ω
절연저항	>2,000 MΩ
영점온도영향	0.028%/10℃
출력온도영향	0.015%/10℃
케이블길이	5m

Model	정격용량(질량)
LC8407-K500	500kgf
LC8407-T001	1tf
LC8407-T002	2tf
LC8407-T003	3tf
LC8407-T005	5tf

Dimensions

CABLE	COLOR CODE
RED	EXC +
WHITE	EXC -
GREEN	SIG +
BLUE	SIG -
BLACK	SHIELD

UNIT=mm

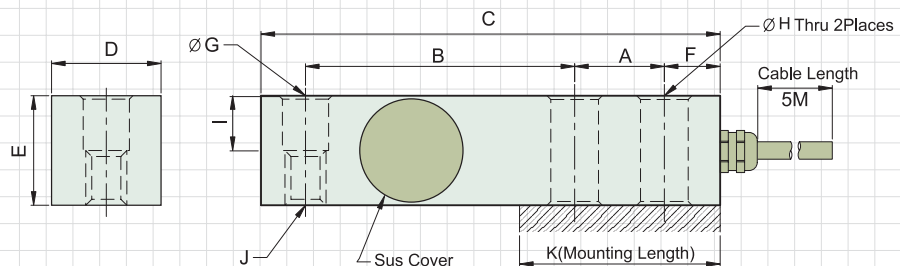

Model	Capacity	A	B	C	D	E	F	G	H	I	J	K
LC8407 K500	500kgf	25.4	76.2	130	32	32	15.8	13.5	13.5	16.0	M12 × 1.75	52
LC8407 T001	1tf											
LC8407 T002	2tf											
LC8407 T003	3tf	38.1	95.3	171.5	38	38	19	20	20	19	M18 × 1.5	76.2
LC8407 T005	5tf											