

THC TENSION load cell, 5ton - 10ton




Cable
Braided Shield 4-wire round cable
with Ø5 PVC-Jacket

SPECIFICATIONS

Max. capacity	tf	5, 10
Rated output	mV/V	2.0 ± 0.2
Zero balance	mV/V	0 ± 0.1
Accuracy class		
Combined error	%	0.3
Repeatability	%	0.1
Creep for 30 min.	%	0.1
Temperature effect on		
Zero Value	%/10°C	0.1
Output value	%/10°C	0.1
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	400 ± 50
Output	Ω	350 ± 3.5
Insulation	M Ω	$> 2,000$
Compensated temperature range	°C	- 10 to +40
Operating temperature range	°C	- 20 to +80

DIMENSIONS

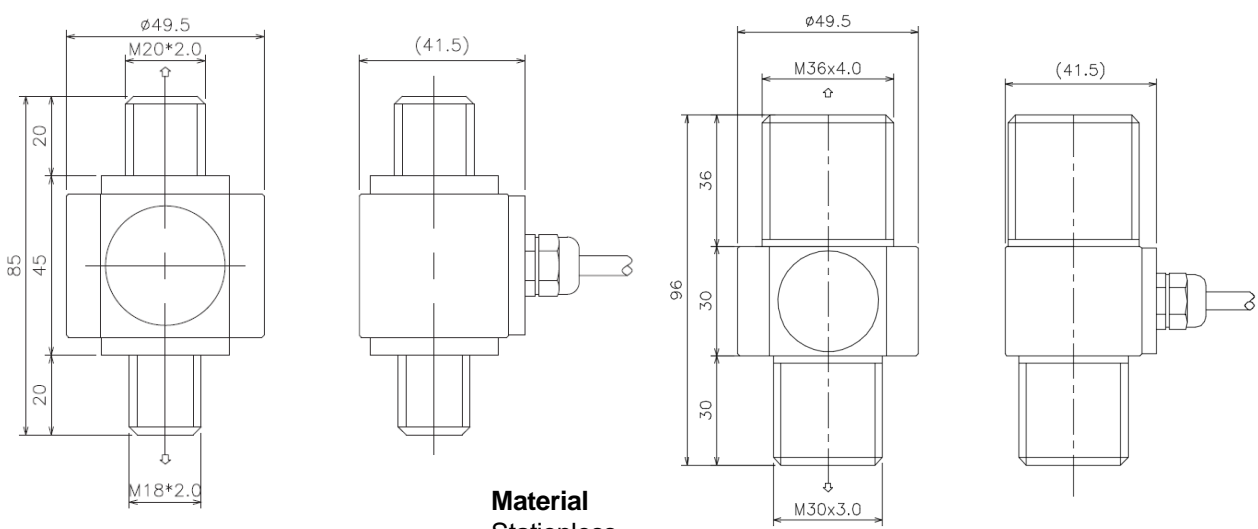

THC-5TCK

THC-10TCK