
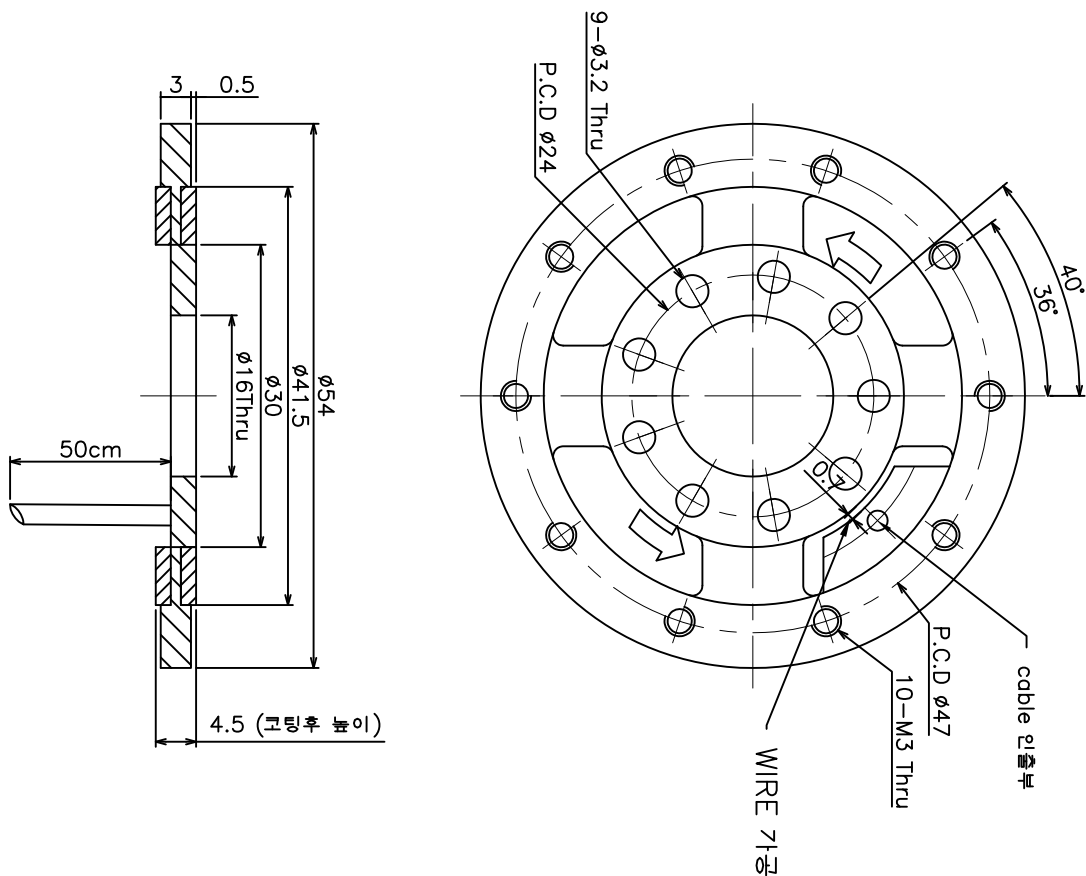




Capacity(용량)	N*m	40
Rated Output(정격 출력)	mV/V	0.8 Nominal
Zero Balance(무부하 범위)	mV/V	0.0 ± 0.1
Combined Error(종합 오차)	%RO	0.2
Repeatability(반복 출력 허용)	%RO	0.1
Creep for (30min)N반출력편차	%RO	0.2
Temperature effect on(온도변화에 따른 범위)		
Zero Value(영점값)	%RO/10°C	0.1
Output Value(출력값)	%RO/10°C	0.1
Excitation(인가전압)		
Recommended(권고 전압)	V	10
Maximum(최대 전압)	V	15
Resistance(저항)		
Input(입력저항)	Ω	700±7
Output(출력저항)	Ω	700±7
Insulation(절연저항)	MΩ	>2000@50V DC
Compensated Temp.Range	°C	-10 ~ +40
Operating Temp.Range(작동범위)	°C	-20 ~ +80

[illegible]