
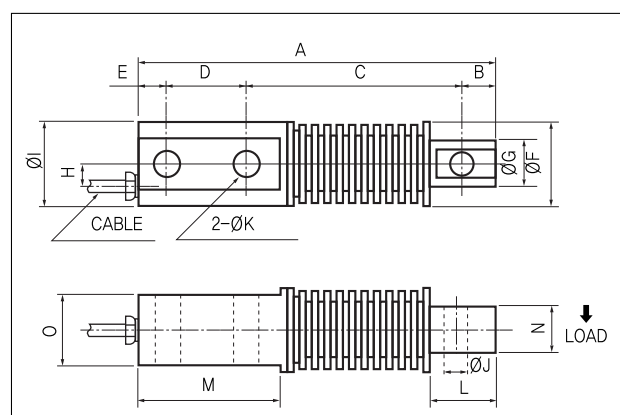



Bending Beam Load Cell

>Model CBC

Stainless steel bellows seal.
Compact, lightweight and easy-to-mount
Protection Class IP67

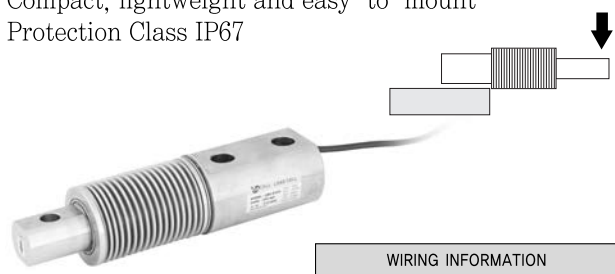

>SPECIFICATIONS

Specifications	Accuracy
Rated capacity(R,C)	10, 20, 50, 100, 200kgf, 500kg (98.07N, 196.1N, 490.3N, 980.7N, 4.903kN)
Rated output(R,O)	2mV/V $\pm$ 0.5%
Nonlinearity	0.03% of R.O.
Hysteresis	0.02% of R.O.
Repeatability	0.02% of R.O.
Zero balance	$\pm$ 1% of R.O.
Temperature effect on rated output	0.02% of LOAD/10°C
Temperature effect on zero balance	0.02% of R.O./10°C
Temperature range, compensated	-10~70°C
Temperature range, safe	-20~80°C
Terminal resistance, input	350 $\pm$ 50 Ω
Terminal resistance, output	350 $\pm$ 5 Ω
Insulation resistance bridge	2000M Ω
Excitation recommended	10V
Safe overload	150% R.C.
Cable length	$\varnothing$ 5 4core cable, 3m

>DIMENSIONS TABLE(CBC)


unit:mm

Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	Weight(kg)
10~100kg (98.1N~980.7N)	130	10	72	35	13	39	20	9	42	8.5	8.5	20	58	17	35	1.0
200~500kg (1.9kN~4.90kN)	200	20	120	45	15	50	29	14	52	12	14	40	80	25	40	1.8

★Specifications are subject to change without notice.

>Model CBC25

Stainless steel bellows seal.
Compact, lightweight and easy-to-mount

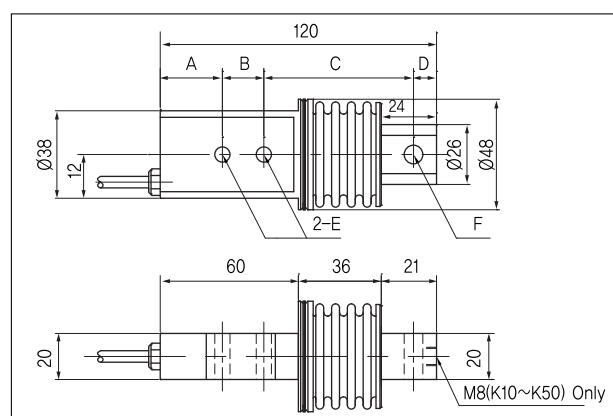

>SPECIFICATIONS

Specifications	Accuracy
Rated capacity(R,C)	10, 20, 50, 100, 200kgf, 300kgf (98.07N ~ 2.940kN)
Rated output(R,O)	2mV/V $\pm$ 0.5%
Nonlinearity	0.05% of R.O.
Hysteresis	0.05% of R.O.
Repeatability	0.03% of R.O.
Zero balance	$\pm$ 1% of R.O.
Temperature effect on rated output	0.02% of LOAD/10°C
Temperature effect on zero balance	0.02% of R.O./10°C
Temperature range, compensated	-10~60°C
Temperature range, safe	-20~80°C
Terminal resistance, input	350 $\pm$ 50 Ω
Terminal resistance, output	350 $\pm$ 5 Ω
Insulation resistance bridge	5000M Ω
Excitation recommended	10V
Safe overload	120% R.C.
Cable length	$\varnothing$ 5 4core cable, 3m

>DIMENSIONS TABLE(CBC25)

unit:mm

Capacity	A	B	C	D	E	F
10kgf, 20kgf, 50kgf	27	18	65	10	6.6	8.1
100kgf, 200kgf, 300kgf	25	20	65	10	8.4	10.1