


Protection to Breakaway (ACCE-SLS-TWM)

DIMENSIONS

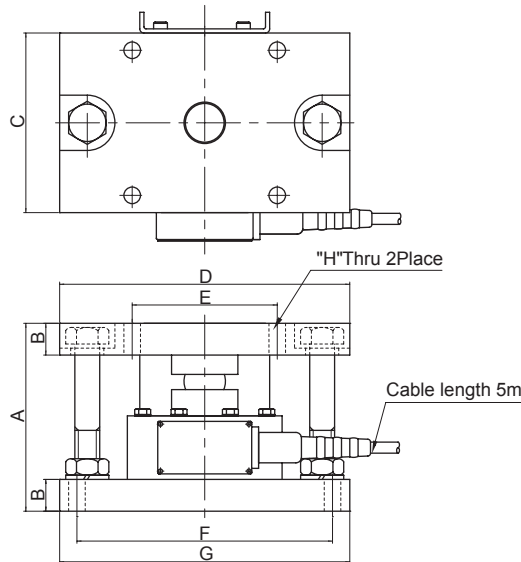

Capacity	A	B	C	D	E	F	G	H
0.5, 1, 2, 3 tf	136	23	130	210	105x105	185x105	210	4 - Ø12
5 tf	145	23	130	210	105x105	185x105	210	4 - Ø12
10, 15 tf	166	30	160	220	105x105	125x125	220	4 - Ø14
20, 30 tf	196	30	200	270	105x105	160x160	270	4 - Ø14

ACCESSORY FEATURES

- 높은 내구성
- Tank 및 Hopper 적용에 적합
- 안전 계수를 고려한 설계
- 볼트에 의한 이탈방지

MANUAL


- 마운팅 플레이트와 로드셀 연결
- 마운팅 플레이트를 표면에 고정
- 마운팅 플레이트의 높이를 확인하십시오.
- 로드셀 위에 로딩 플레이트를 놓습니다.
- 디스플레이 시스템으로 값 확인

MATERIAL

- **Stainless Steel**

Protection to Breakaway (ACCE-CLS-TWE)

DIMENSIONS

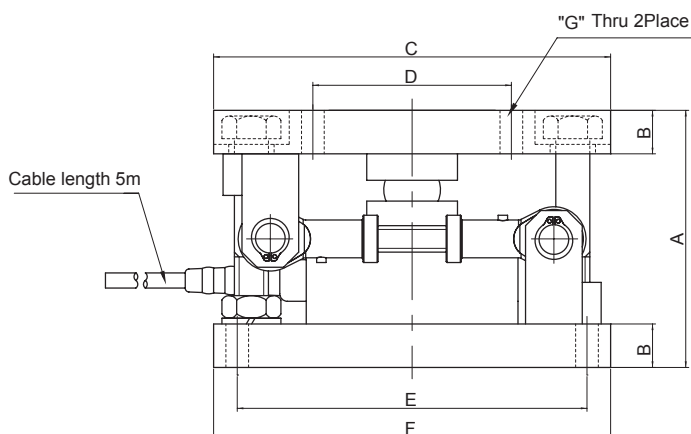

Capacity	A	B	C	D	E	F	G
1, 2, 3 tf	136	23	210x180	105x105	185x105	210x180	4 - Ø12
5 tf	145	23	210x180	105x105	185x105	210x180	4 - Ø12
10, 15 tf	166	23	220x207	105x105	125x125	220x207	4 - Ø14
20, 30 tf	196	23	270x280	105x105	160x160	270x280	4 - Ø14

ACCESSORY FEATURES

- High Durability
- Appropriate for Tank and Hopper application
- Designed with safety Coefficient considerations
- Prevention of separation by the bolt
- Adjustment for the exact position by check rod

MANUAL

- Load cell connection with the Mounting Plate
- Fix the Mounting plate on the surface
- Check the level of the Mounting Plate
- Place the Loading Plate over the Load Cell
- Check the value with a display systems