





TI-2200



TI-2200A




FEATURE

- ◆ Wireless Communication by using ZigBee
- ◆ Water Proof : IP-66
- ◆ Easy to exchange battery pack
- ◆ Interface with Wireless Remote Display and Controller
- ◆ Enable to charge : AC Adapter/Battery Charger Include

| MODEL | TI-2200 | TI-2200A |
|------------------------------|--|--------------------------------|
| Case material | Engineering Plastic | |
| Non linearity | 0.01% F.S. | |
| A/D conversion method | Sigma delta | |
| A/D internal resolution | 1/200,000 | |
| A/D external resolution | 1/10,000 (max.) | |
| Zero adj. range | 0.05mV~5mV | |
| Input sensitivity | 1uV/D | |
| Load Cell Excitation Voltage | DC 3V, 300mA (up to 8 load cell) | |
| Frequency | 2400 ~ 2483.5MHz | |
| RF Output power | Max. 4dBm | |
| Radio Link Effective Range | 100m(Open Space) | |
| Charge adaptor | DC 5V, 1A | |
| Battery pack | Lithium Polymer Battery, Charger Input Include | |
| Temperature range | -10℃ ~ 40℃ | |
| Display lamp | Low Battery (Green), Power On (Red) | |
| Battery life | Max 90hr(1 loadcell) | Max 80hr(1 loadcell) |
| Display | N/A | 0.9"OLED |
| Keypads | Power & Zero (1key) | Power , Zere , Function (3key) |

How to enjoy wireless communication with various products


ex-1

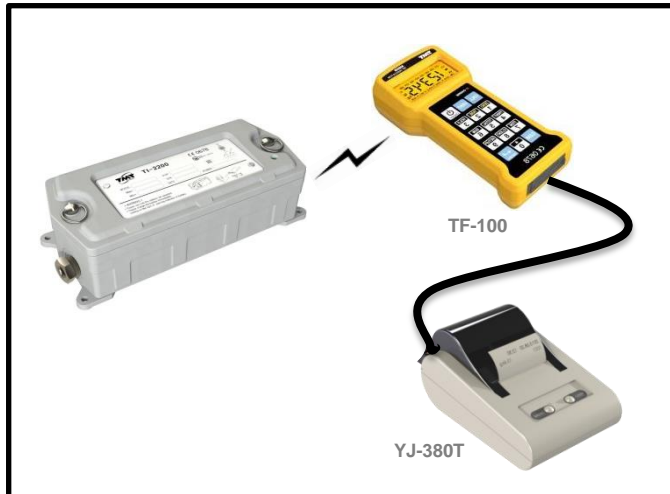


ex-2




ex-3

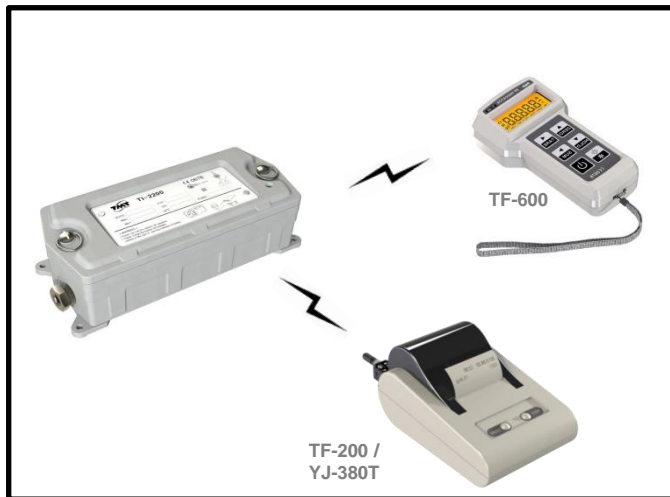

ex-4

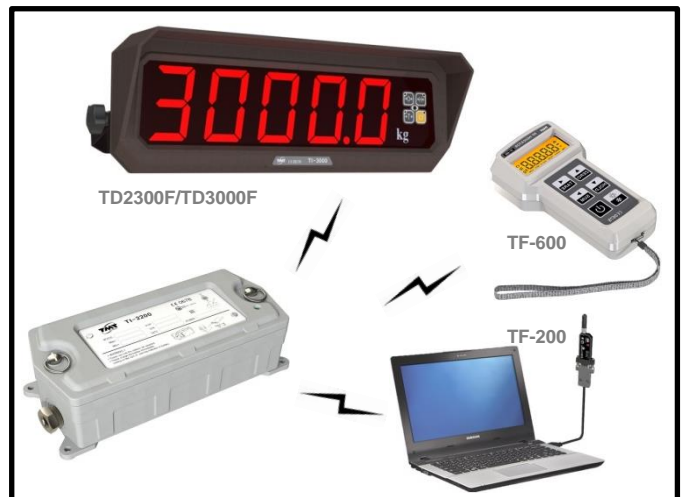

ex-5

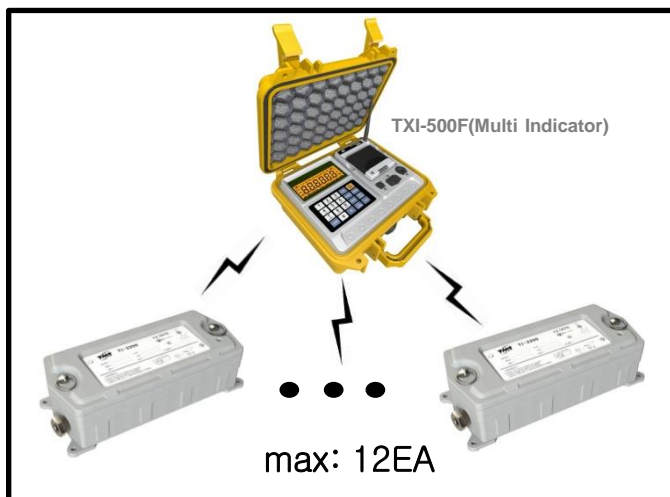

ex-6

