

# CTI-400D


Digital Weighing INDICATOR



## FEATURES

- High resolution / Speed
- Multi-step Calibration (5 Step)
- For Digital load cell
- Adjust 4 corner / Axis
- Option : RS485 / Modbus  
Analog output  
BCD out

## DIMENSIONS

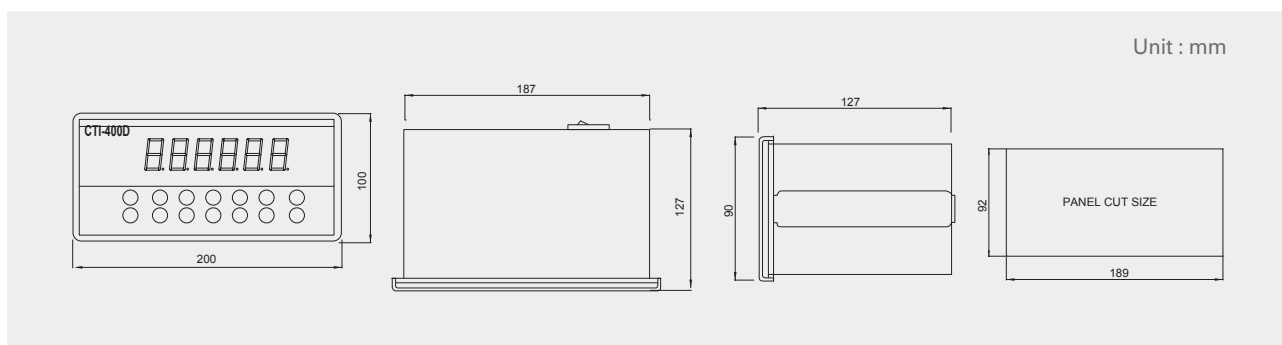

## SPECIFICATIONS

| MODEL                       |                          | CTI-400D                                                                                                          |
|-----------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------|
| DIGITAL LOAD CELL INTERFACE | Excitation Voltage       | DC 12 V Max.                                                                                                      |
|                             | Load cell connection     | 12EA                                                                                                              |
|                             | Communication mode       | CAN                                                                                                               |
|                             | Communication speed      | 2,400 bps ~ 115,200 bps                                                                                           |
| OPERATION CONDITION         | Temperature              | -10 ~ 40℃ (14 ℉ ~ 104 ℉) Humidity : 40% ~ 80% RH, Non-Condensing                                                  |
| FUNCTION                    | Calibrationmode          | Dead Weight Calibration                                                                                           |
|                             | Display                  | 6 Digit, 52.4mm(1inch) RED FND<br>7 ea Weight unit, RED LED<br>8 ea tsatedisplay, GREEN LED<br>12 Point GREEN LED |
|                             | Key                      | 14 EA                                                                                                             |
|                             | External Input           | 6 EA                                                                                                              |
|                             | Power Supply             | AC 110/220V, 50/60Hz, Aobut 20W                                                                                   |
|                             | Serial port1 ( RS-232C ) | DATA Transmit , Serial Printer , MODBUS (RTU)                                                                     |
|                             | Size                     | 200 (W) × 100(H) × 126.5(D) mm                                                                                    |
|                             | Weight                   | Approx. 1.2 kg                                                                                                    |