
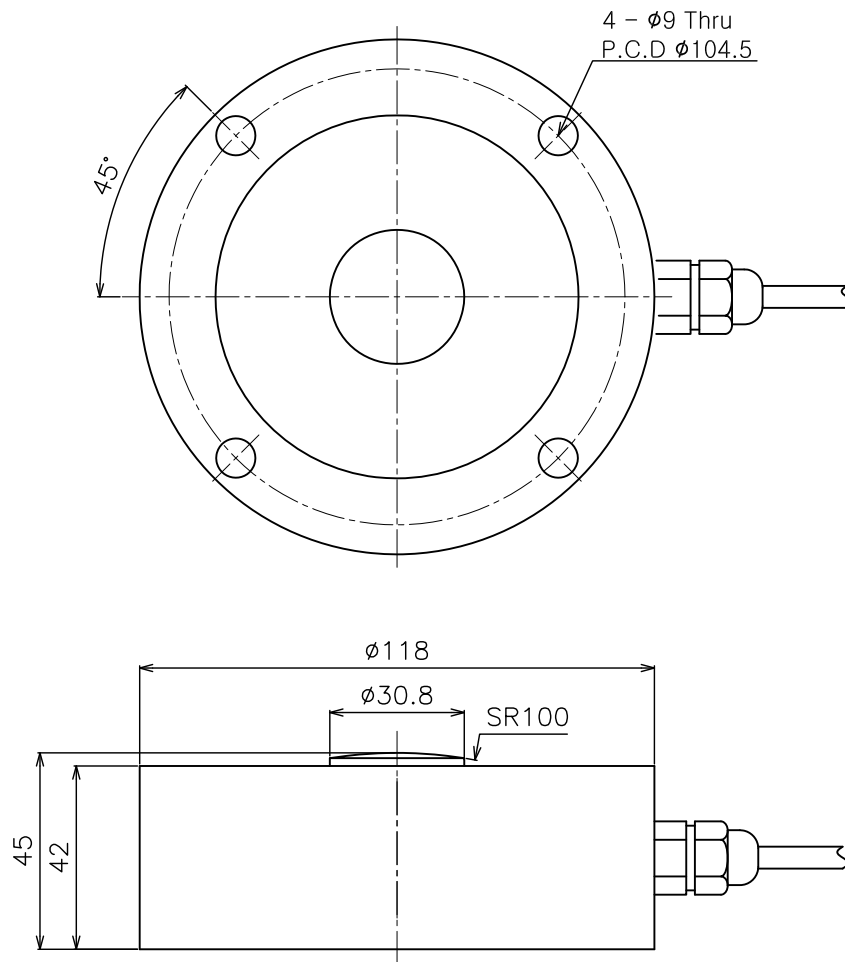


[illegible]

Capacity	tf	20
Rated Output	mV/V	2.0 Nominal
Zero Balance	mV/V	0.0±0.1
Combined Error	%RO	0.1
Repeatability	%RO	0.1
Creep for (30min)	%RO	0.1
Temperature effect on		
Zero Value	%RO/10°c	0.1
Output Value	%RO/10°c	0.1
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	350±3.5
Output	Ω	350±3.5
Insulation	MΩ	>2000@50V DC
Compensated Temp.Range	°c	-10 ~ +40
Operating Temp.Range	°c	-20 ~ +150



				STANDARD	
APPROVE		CASKOREA			
CHECKED					
DRAWN					
DATE	2023.02.16	CUSTOMER	Stainless steel		
	SCALE o/o	TITLE	LSCH-20TCK		
PROJECT No.		Subcontract	DWG No.	REV 	