



### FEATURES

- Robust design and easy installation
- Strong against shock or side force
- Surge protected
- Rotation protected
- Protection class IP68


### Material

- Stainless steel

### Cable

- Braided shield 4-wire round cable with PVC - jacket

### DIMENSIONS

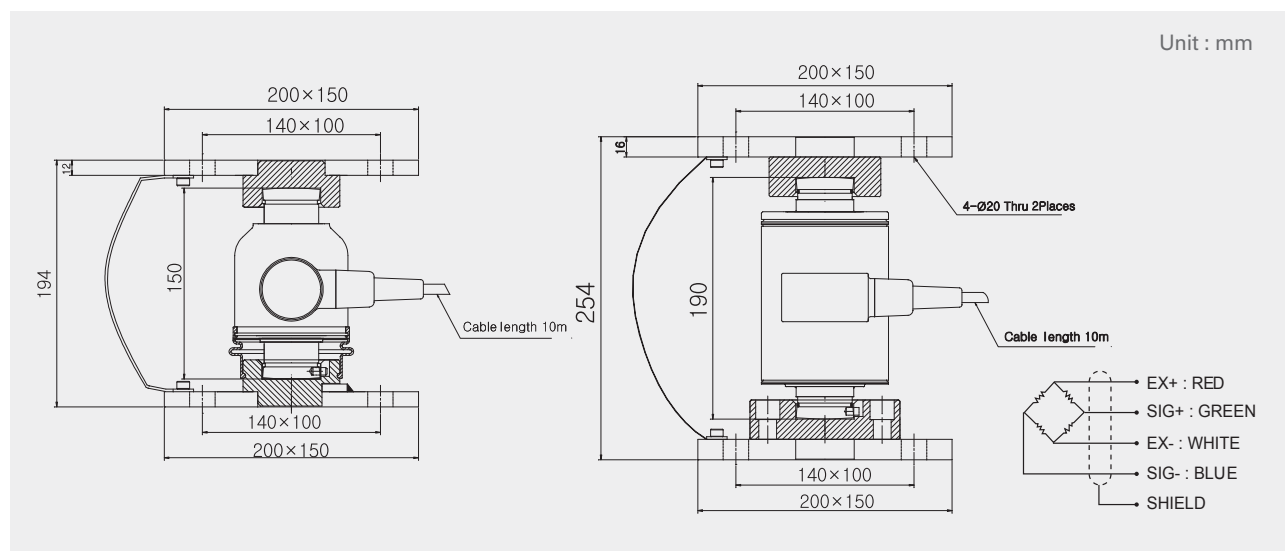

### SPECIFICATIONS

| Max. Capacity           |              | tf       | 25, 30, 50 tf   |       |
|-------------------------|--------------|----------|-----------------|-------|
| Rated output            |              | mV/V     | 2.0 ± 0.005     |       |
| Zero balance            |              | mV/V     | 0 ± 0.03        |       |
| Accuracy class          |              |          | D3              | C3    |
| Combined error          |              | %RO      | 0.03            | 0.02  |
| Repeatability           |              | %RO      | 0.02            | 0.01  |
| Creep (30min.)          |              | %RO      | 0.03            | 0.017 |
| Temperature effect on   | Zero value   | %RO/10°C | 0.03            | 0.014 |
|                         | Output value | %RO/10°C | 0.03            | 0.011 |
| Excitation              | Recommended  | V        | 10              |       |
|                         | Maximum      | V        | 15              |       |
| Resistance              | Input        | Ω        | 350 ± 3.5       |       |
|                         | Output       | Ω        | 350 ± 3.5       |       |
|                         | Insulation   | MΩ       | > 2,000 @50V DC |       |
| Compensated temp. range |              | °C       | -10 ~ +40       |       |
| Operating temp. range   |              | °C       | -20 ~ +80       |       |