




Short Description

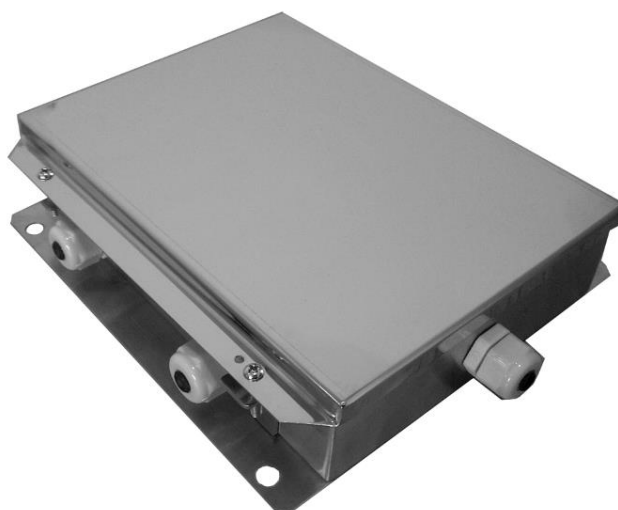

- Fit for 4-wire load cells
- Easy installation
- Stainless steel housing

Available Models

Model	No. of Connections	Full Article Description	Part Number
JB-SS304	4	JB-SS304 4lcs (JXH-4)	30080100
	6	JB-SS304 6lcs (JXH-6)	30080150
	8	JB-SS304 8lcs (JXH-8)	30080200
	10	JB-SS304 10lcs (JXH-10)	30080220




Technical Specifications JB-SS304

Load Cell output Resistance Range	Ω	340 to 1100
Load Cell input Resistance Range	Ω	340 to 1100
Excitation, Recommended Voltage	V(AC&DC)	5 to 15
Excitation, Maximum	V(AC&DC)	20
Load Cell Sensitivity Range	mV/V	0.6 – 3
Cable $\varnothing$	mm	5 to 6.2
Correction Method		Excitation trim
Trimming Range	Ω	20 (± 10)
Temperature Range, Operating	$^{\circ}\text{C}$	-40 ~ +85
Ingress Protection		IP65
Housing Connected to Shield		No
External Grounding		No





Type JB-SS304 Junction Box

Dimensions in mm

4 lcs.

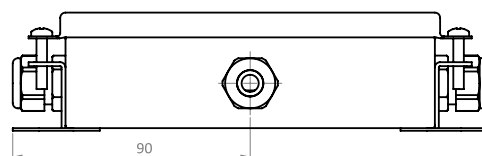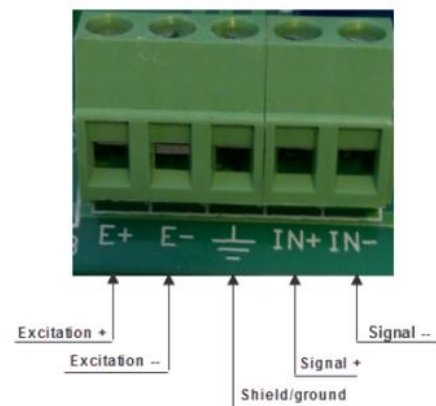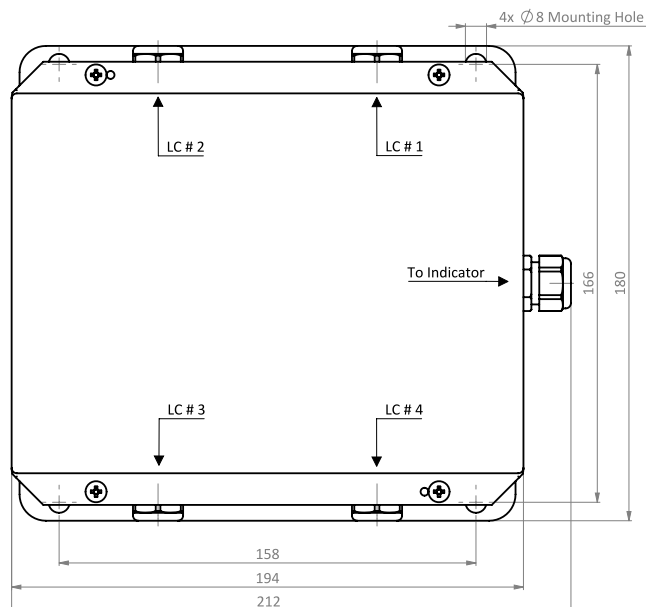




6 lcs.

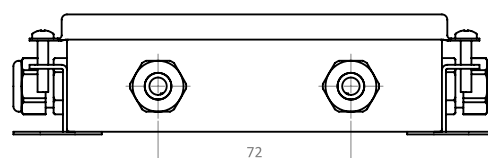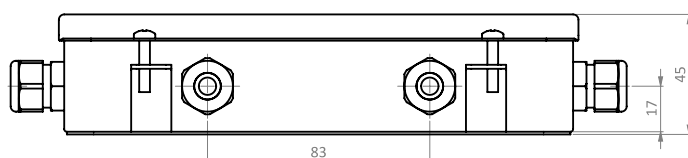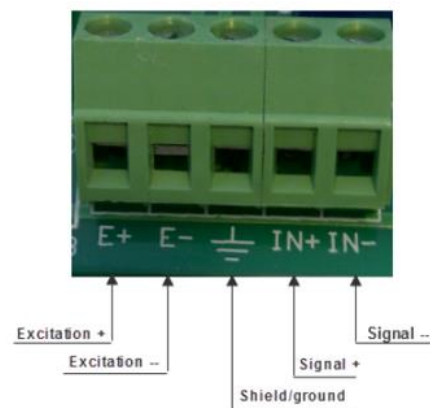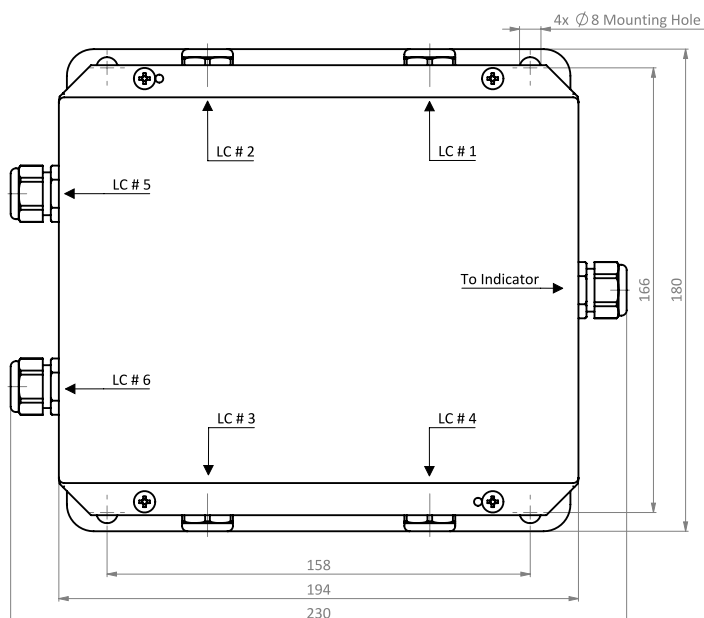




Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type JB-SS304 Junction Box

8 lcs.

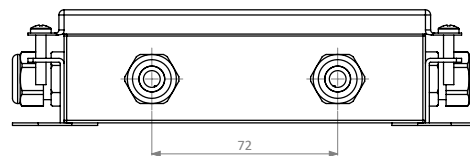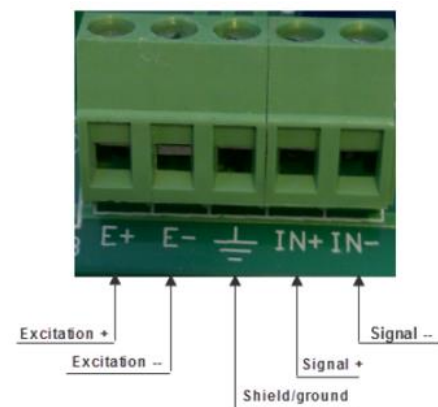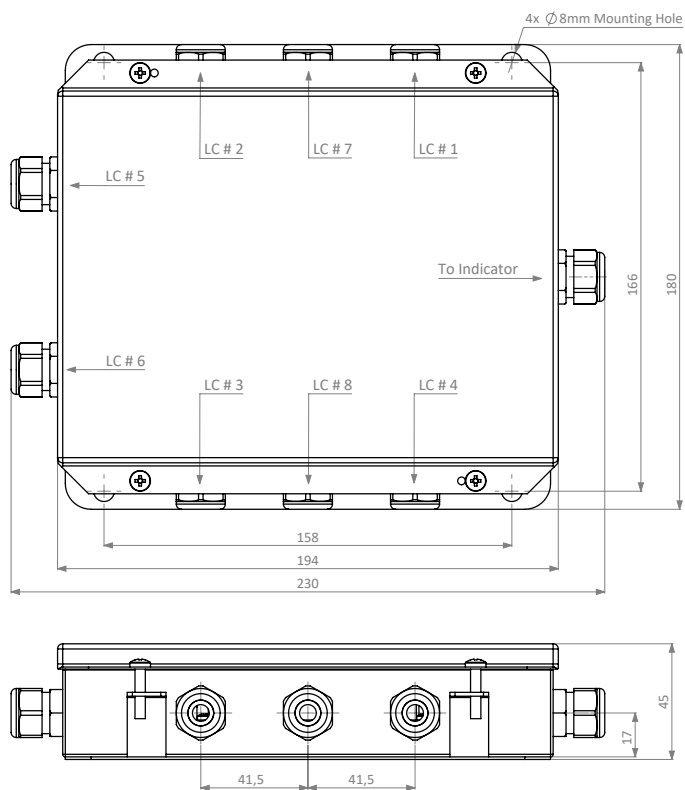

10 lcs.

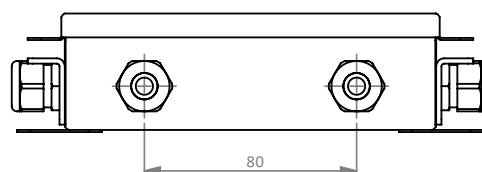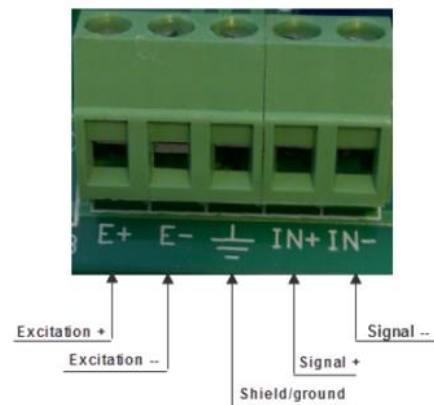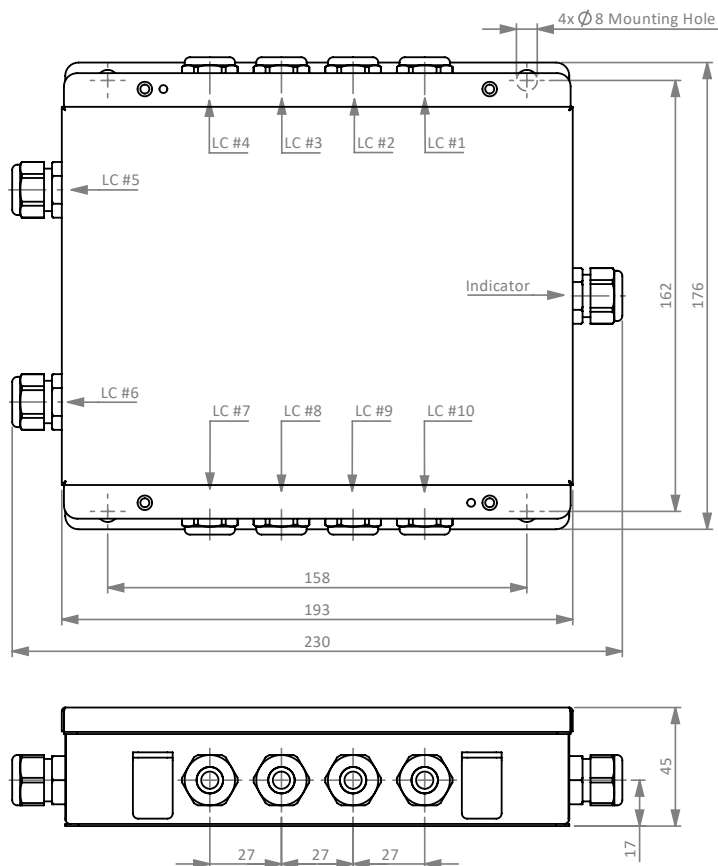

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.