


1/2000 of High Precision Tension/Compression Load Cell

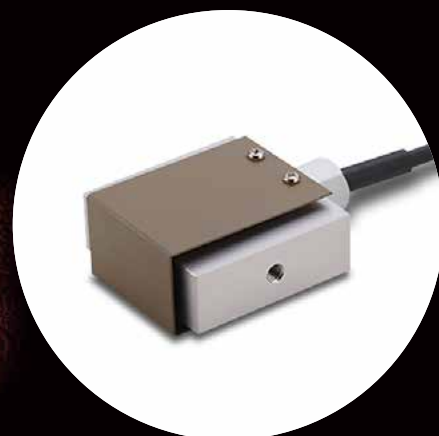

Applications

For measurement of test equipment and conveyor tank scale

Type of Mounting


Fix with screws

Advantages of the TEAC Load Cells

TEAC Load Cells

Since the 1980s, when TEAC started manufacturing and selling load cells, we have cultivated technologies to achieve higher precision and smaller size with our unique structures. With these technologies, a number of load cells that achieve high response, high accuracy, and high stability, as well as products that take environmental conservation into consideration have been developed to match customers' applications. We also offer customization for specific conditions (usage environment, space) that are difficult to meet with standard ones. From one-off prototypes to mass production, we support engineers involved in research and development on manufacturing technology.

Examples of application

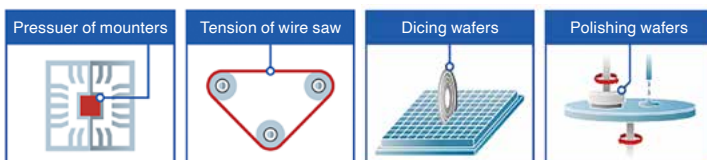


Specifications


Type	Tension/Compression Load Cell						
Model	TU-BR□□N/KN-G						
	RoHS (10 substances)						
Rated Capacity (R.C.)	200N	500N	1kN	2kN	5kN	10kN	20kN
Natural Frequency	0.6kHz	1.2kHz	1kHz	1.5kHz	2.7kHz	2.3kHz	2.2kHz
Weight (Approx.)	0.3kg	0.3kg	0.3kg	0.45kg	0.5kg	0.5kg	1.6kg
Safe overload rating	150% R.C.						
Rated Output (R.O.)	3mV/V ±1%						
Linearity	0.05% R.O.						
Hysteresis	0.05% R.O.						
Repeatability	0.03% R.O.						
Zero Balance	±10% R.O.						
Safe Excitation Voltage	20V						
Input Terminal Resistance	350Ω ±3.5Ω						
Output Terminal Resistance	350Ω ±5Ω						
Insulation Resistance	1000MΩ or more (DC 50V)						
Compensated Temperature Range	-10°C to 70°C						
Permissible Temperature Range	-30°C to 80°C						
Temperature Effect on Zero Balance	0.05% R.O./10°C						
Temperature Effect on Output	0.05% R.C. / 10°C						
Cable	Φ6mm, 4-core shield cable, 5m direct connection with bare lead wires						
Mounting Method	Screw holes						
Body Material	Aluminum			Steel			

Dimensional drawings (Units: mm)

Polarity: Tension (+), Compression (-)

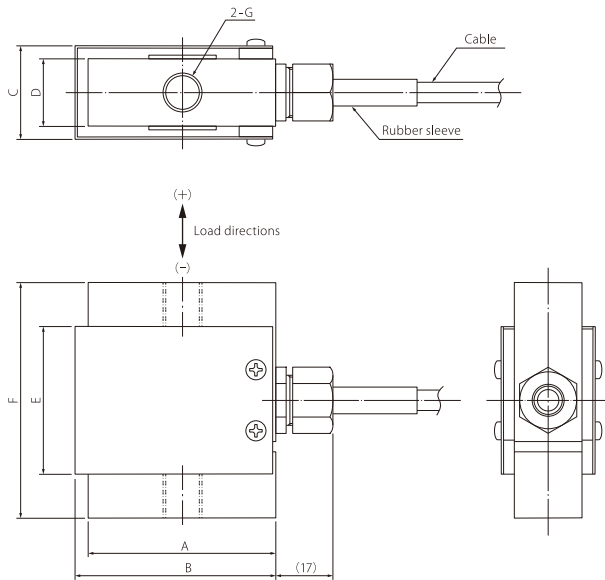

Rod-end Bearing

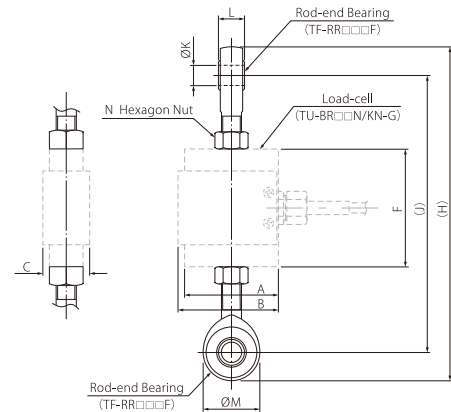

Model	Capacity	A	B	C	D	E	F	G
TU-BR200N-G	200N	56	60	28	20	44	60	M6 x 1 Depth 12
TU-BR500N-G	500N	56	60	28	20	44	60	M6 x 1 Depth 12
TU-BR1KN-G	1kN	56	60	28	20	44	60	M6 x 1 Depth 12
TU-BR2KN-G	2kN	56	60	28	20	44	70	M12 x 1.75 Depth 16
TU-BR5KN-G	5kN	56	60	28	20	44	70	M12 x 1.75 Depth 16
TU-BR10KN-G	10kN	56	60	28	20	44	70	M12 x 1.75 Depth 16
TU-BR20KN-G	20kN	70	74	33	25	58	90	M16 x 2 Depth 20

Loadcell	Rod-end Bearing	H	J	ØK	L	ØM	N
TU-BR200N-G	TF-RR006F	126	108	6H7	9	18	M6 x 1.0
TU-BR500N-G							
TU-BR1KN-G							
TU-BR2KN-G	TF-RR012F	199	165	12H7	16	34	M12 x 1.75
TU-BR5KN-G							
TU-BR10KN-G							
TU-BR20KN-G	TF-RR016F	229	190	16H7	19	39	M16 x 2.0

Related Products (Indicators and Signal Conditioners)



92 x 92mm
Panel opening size

Color Graphics Digital Indicator
TD-9000T
RS-485 model
EtherNet/IP™ model
CC-Link model



92 x 45mm
Panel opening size

Digital Indicator
TD-700T
Standard model
CC-Link model
RS-485 model



Signal Conditioner
TD-SC1
D/A model
RS-485 model
EtherNet/IP™ model
CC-Link model



Attaches to
common DIN rails



Weights only 320g
(incl. batteries)

Portable Digital Indicator
TD-01 Portable

High performance model with large LCD

Supporting two inputs, force sensor and displacement sensor, various comparison judgments function, and direct saving of waveform data onto large capacity internal memory.

TEDS	RoHS	4.3" LCD
Touch Panel	5,000 time/sec.	24-bit
Load/Vary Inputs	Waveform	Static Strain
Interrupt Check	High/Low Limit Compare	Judgements
D/A OUT	RS-232C	Bilingual

Excellent model with compact and high functionality

Supporting five key functions in one unit, numeric display, graph display, TEDS function, static strain display, and signal conditioner. This small and cost-effective TD-700T achieves equal or even higher performance to upper-class models, with high-visibility color LCD and various hold functions.

TEDS	RoHS	4,000 time/sec.	24-bit
Static Strain	Waveform	Bar Meter	D/A OUT
Data Rec	Various Holds	Bilingual	AC/DC Power

CC-Link

Slim and light-weight signal conditioner

Supporting high-speed sampling of 20,000 times/second, PC-based configuration via USB connection, selectable network, and TEDS calibration function.

TEDS	RoHS	Plug-in
20,000 time/sec.	24-bit	Static Strain
Bilingual	High/Low Limit Compare	Hold Functions

CC-Link EtherNet/IP

On-site checking tool with versatility

Supporting various functions that equal to embedded systems, in hand-held size, allowing you to take measurements anytime anywhere, according to your purpose.

TEDS	RoHS	Color LCD
Waveform	Bar Meter	High/Low Limit Compare
Data Rec	Static Strain	Interrupt Check
D/A OUT	Dual I/O	24-bit
AA Batteries	Long Time Operation	Bilingual

CE

CC-Link EtherNet/IP

EtherNet/IP is a trademark of ODVA, Inc. Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective holders.

TEAC CORPORATION

1-47 Ochiai, Tama-shi, Tokyo
206-8530, Japan

E-mail: cs_ipd@teac.jp
Web: https://loadcell.jp/en/

TEAC America, Inc.,

E-mail: datarecorder@teac.com

TEAC EUROPE GmbH.

E-mail: info@teac.eu

TEAC SALES & TRADING (ShenZhen) CO., LTD.

E-mail: teacservice3@teac.com.cn