



65023A-5107-10 Single-Ended Shear Beam, Alloy Steel NTEP 1:5000 Class III Multiple Cell, IP67



Picture is a representation of actual product

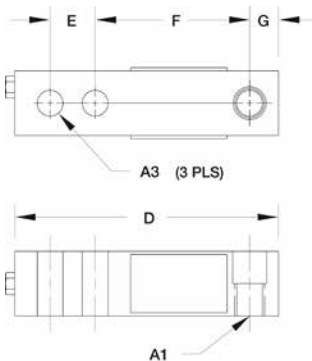

NOW
AVAILABLE
In 5,000lb



SPECIFICATIONS

Full Scale Output: 3.0mV/V	Manufacturer Model Number: 65023A-XX-5107-10	Hysteresis: 0.02% Full scale	Cable Diameter: .200 polyurethane jacket
Output Resistance: 349-355	Safe Overload: 150% Full scale	Insulation Resistance: 5000 megohms	Cable Color Code: Red+ Excitation Black.....- Excitation Green.....+ Signal White- Signal
Input Resistance: 343-357	Safe Sideload: 100% Full scale	Deflection at Capacity: 1000 lb=.013 in/.33 mm, 2500 lb-4000 lb=.015 in/.38 mm	Warranty: One-year limited warranty
Material/Finish: High-alloy steel, nickel plated	Rated Excitation: 10V DC (15V maximum)	Seal Type: Environmentally sealed, IP67	Approvals:  
Temperature: Compensated range 14°F to 104°F/-10°C to 40°C	Nonlinearity: 0.03% Full scale	Cable Length: 10 ft/3.1 m	

DIMENSIONS

RATED CAPACITY	A1	A2	A3	B	C	D	E	F	G
lb/inches									
1000-5000SE	1/2-20 UNF-2B	.62	.53	1.25	1.25	5.12	1.00	3.00	.50
kg/mm									
453.6-1814.4	1/2-20 UNF-2B	15.8	13.5	31.8	31.8	130.1	25.4	76.2	12.7

ORDER INFORMATION

LOAD RATING		PART #	PRICE
1000 lb	(453.6 kg)	68827	\$295.00
2500 lb	(1134.0 kg)	68826	295.00
5000SE	(2268.0 kg)	156958	295.00

INTERCHANGEABLE PRODUCTS

MANUFACTURER	MODEL
Pennsylvania	65023A-XX-5141