



Short Description



- Stainless steel IP68 compression load cell
- Hermetically sealed
- Suitable for large containers, tanks, silos and weigh bridges including truck scales
- Built-in surge arrestors
- Current calibrated (SC-option)

 Test certificate no. D09-07.01 Rev. 1

Available Models

Capacity	Accuracy	Full Article Description
10t	C3	BM14A-C3-10t-10B/20B-SC
25t	C3	BM14A-C3-25t-20B-SC
40t	C3	BM14A-C3-40t-20B-SC
60t	C3	BM14A-C3-60t-20B-SC
100t	C3	BM14A-C3-100t-20B-SC
200t	G1 (Excluded from OIML)	BM14A-G1-200t-20B

Technical Specifications BM14A


Accuracy Class		OIML R60 C3			G1	
Output Sensitivity (= FS)	mV/V	2.0 ± 0.002				
Maximum Capacity (E _{max})	t	10, 25, 40		60, 100		200
Max. Number of Load Cell Intervals	n _{LC}	3000			1000	
Ratio of min. LC Verification Interval	Y = E _{max} / V _{min}	9000		10000		10000
Combined Error	%FS	≤± 0.020			≤± 0.100	
Creep Error (30 minutes)	%FS	≤± 0.016			≤± 0.038	
Temperature Effect on Zero (ZTC)	%FS/10°C	≤± 0.015			≤± 0.019	
Temperature Effect on Sensitivity (STC)	%FS/10°C	≤± 0.011			≤± 0.028	
Zero Balance	%FS	≤± 1.0				
Safe Overload	%FS	150				
Ultimate Overload	%FS	300				
Excitation, Recommended Voltage	V	5 ~ 12				
Excitation, Maximum Voltage	V	18				
Input Resistance	Ω	450 ± 5				
Output Resistance	Ω	480 ± 5				
Insulation Resistance (50V)	MΩ	≥5000				
Compensated Temperature	°C	-10 ~ + 40				
Operating Temperature	°C	-35 ~ + 65				
Storage Temperature	°C	-40 ~ + 70				
Load Cell Weight	kg	10t-25t: 3,5	40t-60t: 7,5	100t: 17	200t: 29	
Element Material		Stainless Steel				
Ingress Protection (acc. to EN 60529)		IP68				
ATEX Classification (Optional)		II 1G Ex ia IIC T4 Ga		II 1D Ex ia IIIC T 200 135°C Da		II 3G Ex ic IIC T4 Gc

Wiring

Features:

Cable type: Shielded, 4 conductor cable , conductor AWG 21
 Cable diameter: Ø 7.5mm
 Cable length: 20m for all capacities, 10m for 10t capacity only
 Cable jacket: Polyurethane
 Shield not connected to element


4-Wire Connection Diagram

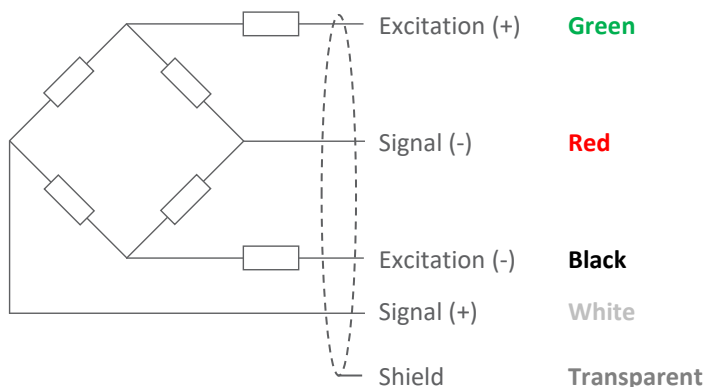


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm

Top View

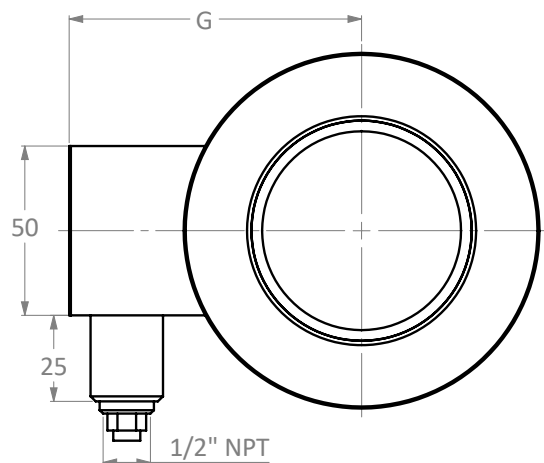

Side View

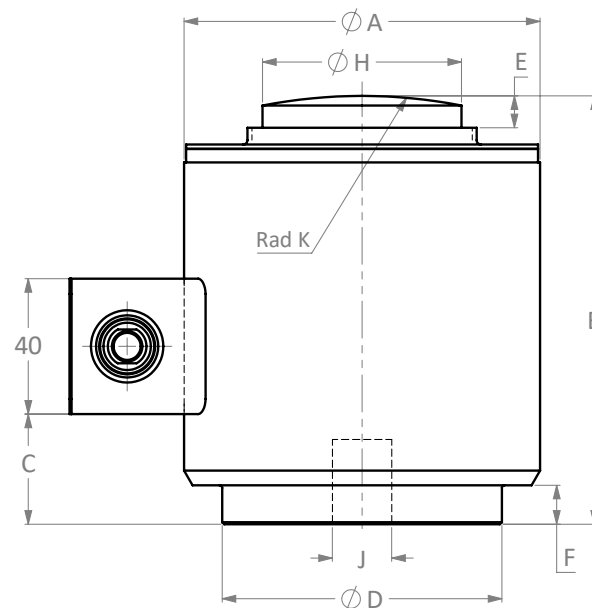


Dimension Capacity	ØA	B	C	ØD	E	F	G	ØH	K _{rad}	J
10t, 25t	73	82.5	12	58	6.5	1.8	64	31.8	152	M12
40t, 60t	105	127	34	82.5	8	11	87	58.7	152	M20
100t	152.4	184	72	123.8	23.6	21.8	108	79.2	432	M20
200t	167.6	228.6	92	136.3	10.9	25.4	123	93.7	432	M20

Available Accessories

BY-14-101-10-25t Rocker Support

- Stainless steel rocker support set
- Easy installation
- Good self-aligning ability
- Anti-reversal ability
- Can be used under hazardous environments
- Total installation height 216mm



BY-14-101-40-60t Rocker Support

- Stainless steel rocker support set
- Easy installation
- Good self-aligning ability
- Anti-reversal ability
- Can be used under hazardous environments
- Total installation height 260mm

