

STI-1000

Digital Weighing INDICATOR



FEATURES

- Appropriate for weight and measurement system
- Easy operation and various options
- Simple Full Digital Calibration (Single pass automatic span calibration)
- Watchdog Circuitry (System restoration)
- Panel Mount Type (Cutting Size : 92 mm × 45 mm)
- Standard RS-232 Serial Interface
- Variety of Option



OPTIONS

- Relay Output
- Analog Output (0 ~ 10 V)
- Analog Output (4 ~ 20 mA)
- RS-485
- Clock
- SMPS POWER (AC Free Voltage)
- DC POWER

SPECIFICATIONS

MODEL	STI-1000
Load Cell Excitation Voltage	DC 5V, up to 6 x 350 Ω LOAD CELLS
Zero Adjust Range	-10 mV ~ 10 mV
A/D External Resolution	5,000dd (H_44.OIML) / 30,000 dd (Non H_44. OIML)
A/D Conversion Speed	20 times / sec
Display	LED 5 DIGIT
Dimension	96(W) × 48(D) × 112(H) mm
Power	AC 110 / 220 V, 50 / 60 Hz

DIMENSIONS

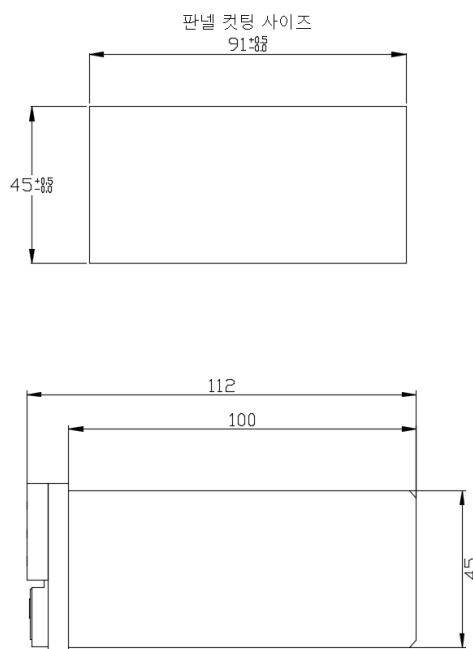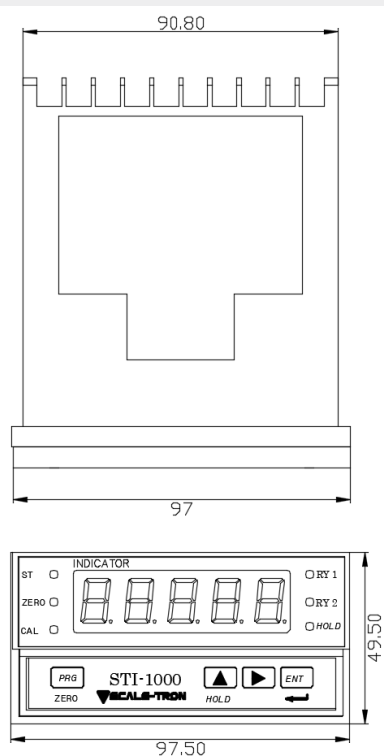

Unit : mm