


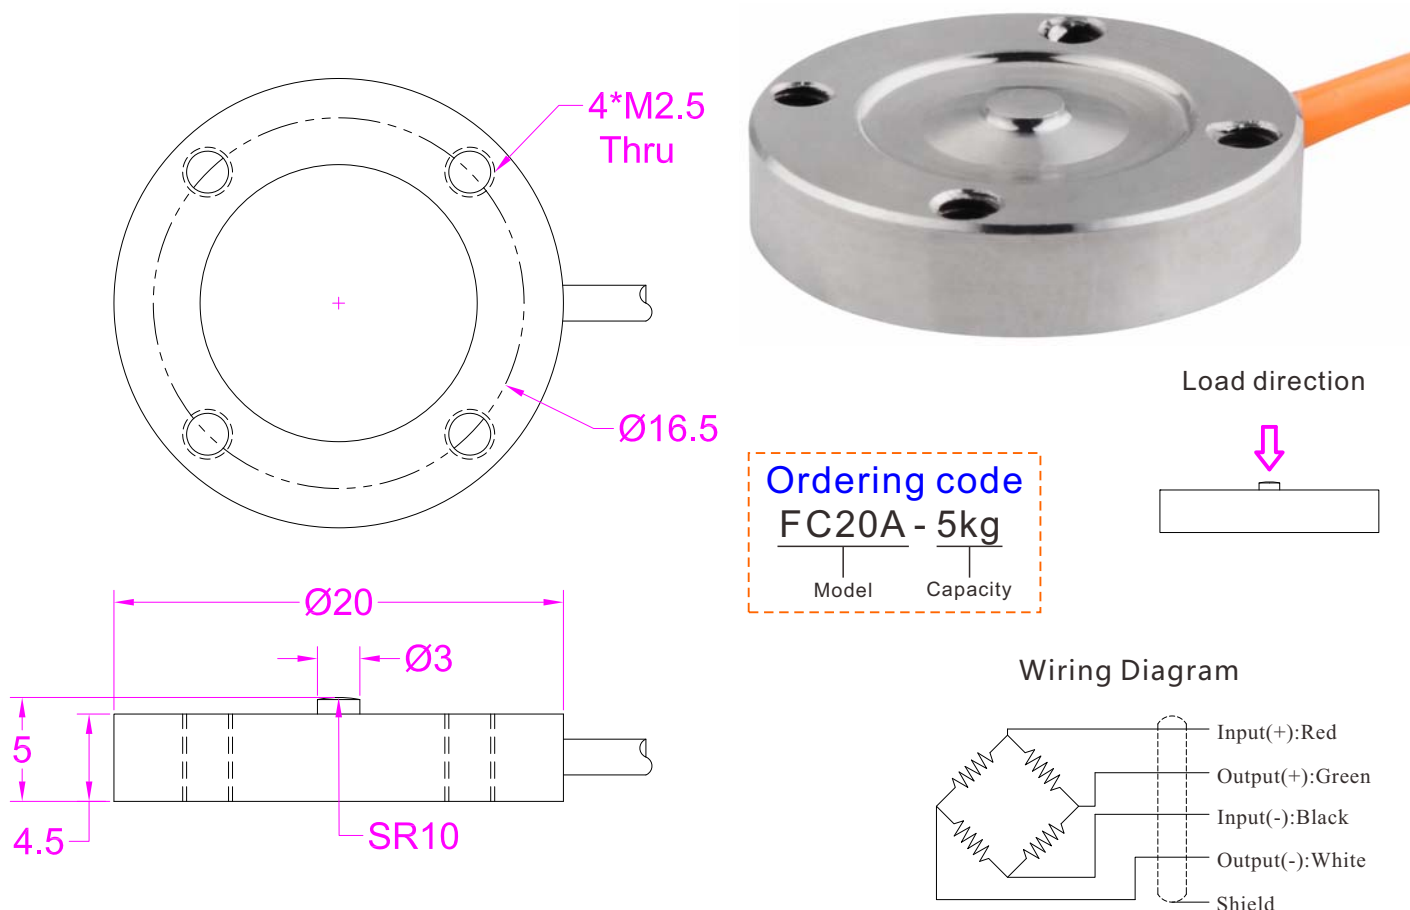

--- Specifications ---

Capacity	5/10/20/50/100 kg		
Rated Output	1.5mV/V	Compensated Temp.	−10...+40°C
Excitation	3~10V	Operating Temp.	−20...+60°C
Zero Balance	±0.1mV/V	Temp. Shift Zero	±0.05% of R.O./°C
Nonlinearity	±1% of R.O.	Temp. Shift Span	±0.05% of R.O./°C
Hysteresis	±1% of R.O.	Input Resistance	900±100Ω
Nonrepeatability	±0.5% of R.O.	Output Resistance	900±100Ω
Creep(3min)	±0.2% of R.O.	Insulation Resistance	>2000MΩ(50V)
Safe Overload	120% of F.S.	Ingress Protection	IP62
Ultimate Overload	150% of F.S.	Material of Element	Stainless steel
Cable	Ø2*3000mm 4-core shielded cable		
R.O.=Rated Output		F.S.=Full Scale	

• Subject to change without notice