


Alloy Steel; Wireless Tension Link; Patent Design



TENSLINK™

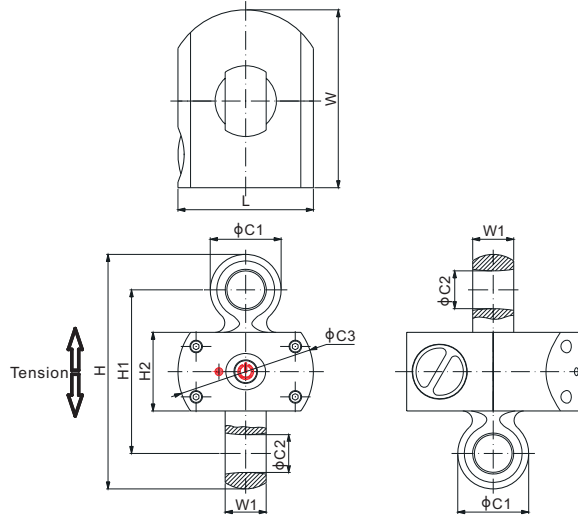

CE RoHS

* 표시기는 별도로 주문

DIMENSIONS

권장 SHACKLE

RATED CAPACITY	C1	C2	C3	H	H1	H2	L	W	W1	
t/mm										
0.5; 1; 2	33.0	18.0	80.0	110.0	74.0	38.0	80.0	110.0	18.0	Crosby G-2130-2t or SBX-2t
3	35.0	21.0	80.0	129.0	88.0	38.0	80.0	110.0	25.0	Crosby G-2130-3.25t or SBX-3.25t
5	50.0	27.0	86.0	164.6	110.6	50.0	86.0	113.0	33.0	Crosby G-2130-6.5t or SBX-6.5t
10	63.0	37.0	86.0	205.0	135.0	50.0	86.0	125.0	41.0	Crosby G-2130-12t or SBX-12t
20	90.0	53.0	100.0	249.0	153.0	53.0	100.0	140.0	66.0	Crosby G-2130-25t or SBX-25t
30	87.0	44.0	100.0	248.0	150.0	50.0	100.0	152.0	58.0	Crosby G-2140-30t or TBX-30t
50	115.0	62.0	150.0	321.0	206.0	74.0	150.0	170.0	79.0	Crosby G-2140-55t or TBX-50t
100	170.0	88.0	180.0	442.0	260.0	65.0	180.0	190.0	122.0	Crosby G-2140-120t or TBX-110t
Kib/inches (conversion of above dimensions)										
1; 2; 4	1.30	0.71	3.15	4.33	2.91	1.50	3.15	4.33	0.71	Crosby G-2130-2t or SBX-2t
5	1.38	0.83	3.15	5.08	3.46	1.50	3.15	4.33	0.98	Crosby G-2130-3.25t or SBX-3.25t
10	1.97	1.06	3.39	6.48	4.35	1.97	3.39	4.45	1.30	Crosby G-2130-6.5t or SBX-6.5t
20	2.48	1.46	3.39	8.07	5.31	1.97	3.39	4.92	1.61	Crosby G-2130-12t or SBX-12t
40	3.54	2.09	3.94	9.80	6.02	2.09	3.94	5.51	2.60	Crosby G-2130-25t or SBX-25t
60	3.43	1.73	3.94	9.76	5.91	1.97	3.94	5.98	2.28	Crosby G-2140-30t or TBX-30t
100	4.53	2.44	5.91	13.03	8.11	2.91	5.91	6.69	3.11	Crosby G-2140-55t or TBX-50t
200	6.69	3.46	7.09	17.40	10.24	2.56	7.09	7.48	4.80	Crosby G-2140-120t or TBX-110t

SPECIFICATIONS					
Division	500kg	0.1kg	Combined Error	0.03%	
	1t	0.2kg		Max. Safety Load	200% of full scale
	2t	0.5kg	Ultimate Load	500% of full scale	
	3t, 5t	1kg	Transmission Range	Up to 30m at lowest power setting.	
		2kg		Up to 75m at highest power setting, unobstructed	
	20t	5kg	Rechargeable Battery Type	3 x AA Alkaline batteries	
	30t, 50t	10kg	Operation Time	Up to 100 hours at 20°C and at the lowest power setting	
	100t	20kg	Operating Humidity	<85% RH under 20°C[68°F]	
	IP Rating	IP67		Operating Temperature	-10°C to 50°C / 14°F to 122°F
Enclosure	Alloy Steel, Powder Coating				

PART NUMBER			
Rated Capacity	Frequency	Part No.	Self Weight Approx. (kg)
500kg.....	433 MHz.....	110RH-ST-500kg-WL01.....	0.6
	915 MHz.....	110RH-ST-500kg-WL02.....	0.6
1t	433 MHz.....	110RH-ST-1t-WL01.....	0.6
	915 MHz.....	110RH-ST-1t-WL02.....	0.6
2t	433 MHz.....	110RH-ST-2t-WL01.....	0.6
	915 MHz.....	110RH-ST-2t-WL02.....	0.6
3t	433 MHz.....	110RH-ST-3t-WL01.....	1.0
	915 MHz.....	110RH-ST-3t-WL02.....	1.0
5t	433 MHz.....	110RH-ST-5t-WL01.....	1.4
	915 MHz.....	110RH-ST-5t-WL02.....	1.4

PART NUMBER			
Rated Capacity	Frequency	Part No.	Self Weight Approx. (kg)
10t	433 MHz.....	110RH-ST-10t-WL01.....	2.3
	915 MHz.....	110RH-ST-10t-WL02.....	2.3
20t	433 MHz.....	110RH-ST-20t-WL01.....	4.7
	915 MHz.....	110RH-ST-20t-WL02.....	4.7
30t	433 MHz.....	110RH-30t-WL01.....	5.5
	915 MHz.....	110RH-30t-WL02.....	5.5
50t	433 MHz.....	110RH-50t-WL01.....	16.0
	915 MHz.....	110RH-50t-WL02.....	16.0
100t	433 MHz.....	110RH-100t-WL01.....	35.0
	915 MHz.....	110RH-100t-WL02.....	35.0

www.anyload.com

TENSION LINKS

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the “Information”) in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD’s knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:

Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

⚠ WARNING: Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.