


Load direction

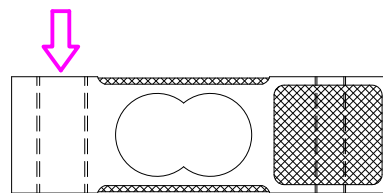


Ordering code

**FNHQ - 60kg**

Model

Capacity

Wiring Diagram

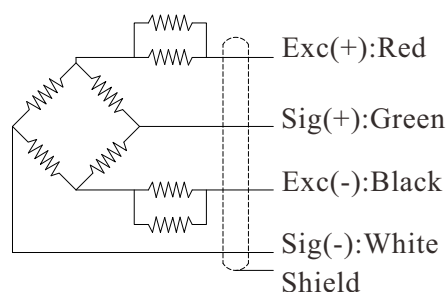

--- Specifications ---

Capacity	20/40/60/100/200kg		
Rated Output	2.0±10% $mV/V$	Compensated Temp.	0...+40°C
Excitation	3~15V	Operating Temp.	-20...+60°C
Zero Balance	±0.05 $mV/V$	Temp. Shift Zero	±0.03% of R.O./10°C
Nonlinearity	±0.02% of R.O.	Temp. Shift Span	±0.02% of R.O./10°C
Hysteresis	±0.02% of R.O.	Input Resistance	410±15 $\Omega$
Nonrepeatability	±0.02% of R.O.	Output Resistance	350±5 $\Omega$
Creep(30min)	±0.03% of R.O.	Insulation Resistance	>2000 $M\Omega$ (50V)
Safe Overload	150% of F.S.	Ingress Protection	IP65
Ultimate Overload	200% of F.S.	Material of Element	Aluminum alloy
Cable	Ø4*500mm 4-core shielded cable		
R.O.=Rated Output F.S.=Full Scale			

• Subject to change without notice