



REVISIONS									
MODEL NO.	PART NO.	REV	SYM	CONTENTS			DRAWN	CHECKED	APPROVED

* 고온용 로드셀
* Accessory는 Option 구매 사양

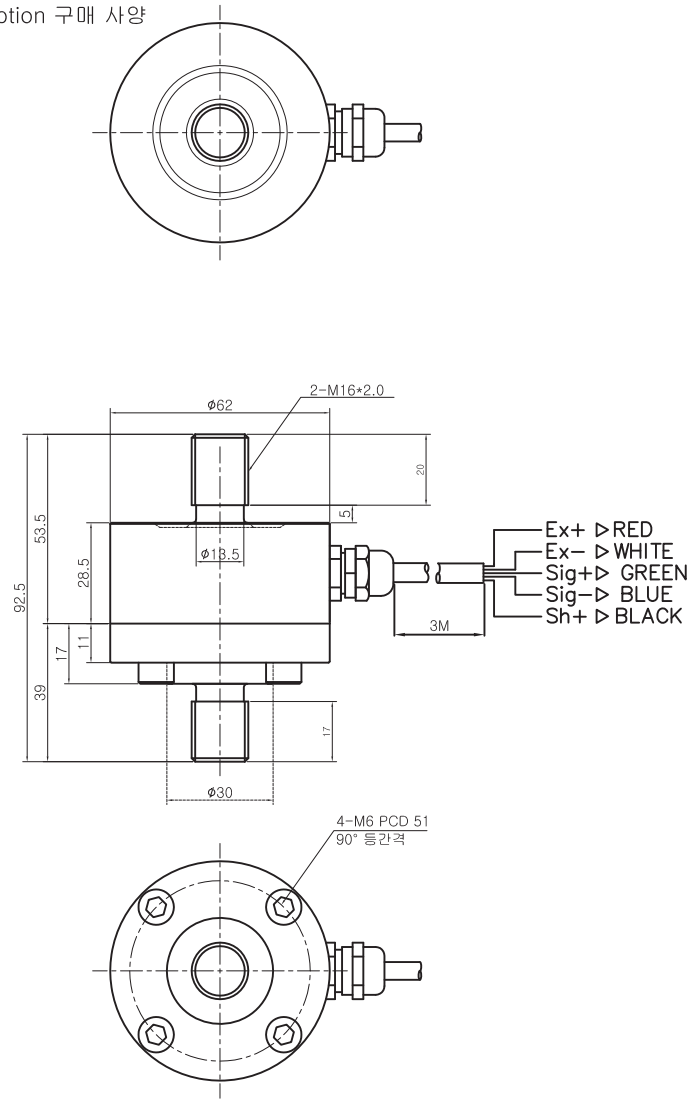

< Acc'y Assembly >

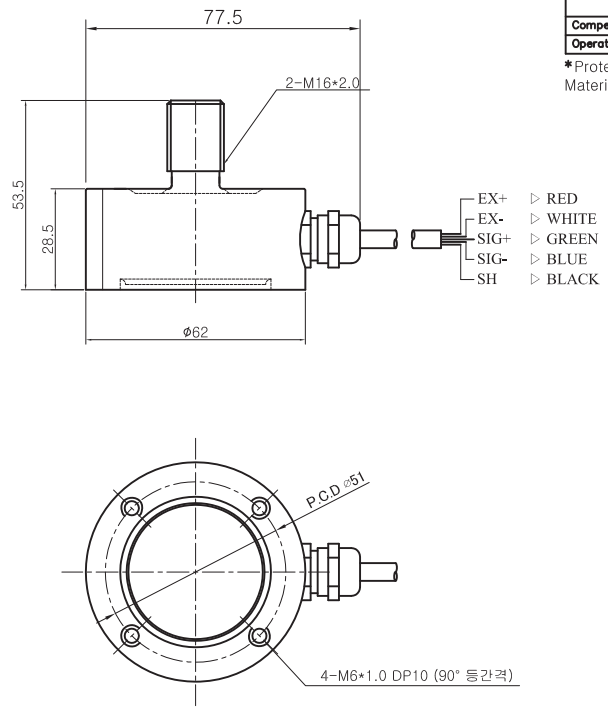

< ZMNT-1~2T Dimension >

Max. Capacity	tf	1
Rated Output	mV/V	2.0 ± 0.1
Zero Balance	mV/V	0 ± 0.06
Combined Error	%	0.15
Repeatability	%	0.05
Creep for 30min.	%	0.03
Temperature effect on		
Zero Value	%/10℃	0.1
Output Value	%/10℃	0.1
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	420 ± 30
Output	Ω	350 ± 10
Insulation	MΩ	>2,000
Compensated Temperature Range	℃	40 to +150
Operating Temperature Range	℃	20 to +180

*Protection Class IP67
Material : Stainless Steel

Dimensions and specifications are subject to change without notice

NO	TITLE	MATERIAL	Q'TY	REMARKS
TOLERANCES UNLESS OTHERWISE SPECIFIED	NAME OR TITLE	CASKOREA		
ANGULAR ±	ZMNT-1TH(고온용) SPECIFICATIONS			
DECIMAL ±	FIRST USED IN ASSEMBLY	MATERIAL Stainless Steel		
Q'TY/SET	FRIST MADE FOR	END FINISH		
1/1	CONTRACT OR CUSTOMER NO	DO NOT SCALE DRAWING	DIMENSIONS ARE IN MM(INCH)	
DRAWN	CHECKED 1	CHECKED 2	APPROVED	SCALE
Y.S.Kim				1/1
4.25.2004				ZMNC