



TCS-20T
shackle type

TCS-5T
hook type



TF-100




TF-600

**ZigBee Wireless
Controller
(Option)**



TD-2300F/3000F

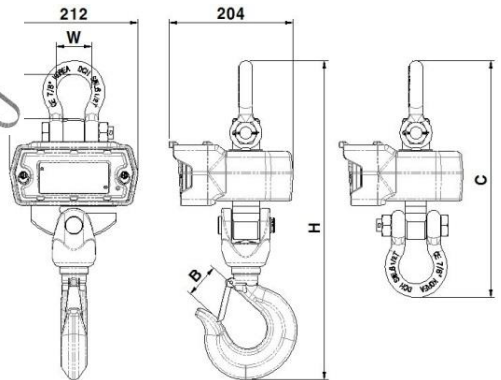

MODEL	DIMMENSION				
	H	A	W	B	C
TS -1T	407	62	50	25	-
TS -3T	503	73	57	34	-
TS-5T	525	73	57	40	-
TS -10T	679	101	83	53	520
TS-15T	826	127	98	64	623
TS-20T	1031	151	128	75	745

FEATURE

- ◆ Zigbee wireless communication (Standard)
- ◆ Water Proof : IP-65
- ◆ Long Life Lithium Polymer Battery and Easy to Replace Battery Pack
- ◆ Interface with Wireless Remote Display and Controller

MODEL	TCS-1T	TCS-3T	TCS-5T	TCS-10T	TCS-15T	TCS-20T
Capacity	1,000kg	3,000kg	5,000kg	10,000kg	15,000kg	20,000kg
Division	0.5kg	1kg	2kg	5kg	10kg	10kg
Max. Tare Weight	1,000kg	3,000kg	5,000kg	10,000kg	15,000kg	20,000kg
Weight (hook type)	8.6kg	14.9kg	16.4kg	26.6kg	46kg	66kg
Operating Time	Approx. 90hr					
Temperature	-10℃ ~ 40℃					
Function	Power & Zero key (1key)					
Display lamp	Low Battery (Green), Power On (Red)					
Parts	Charging Adaptor, Lithium Polymer Battery Pack					
Battery	Lithium Polymer Battery 3.7V					
Battery Spec.	3.7V 4000mA (Size:68x125x12)					
Radio Rink	2400 ~ 2483.5MHz					
RF Output Power	Max. 4dBm					
Radio Link Effective Range	100m(Open Space)					
Charging Adaptor	DC 5V, 1A					